
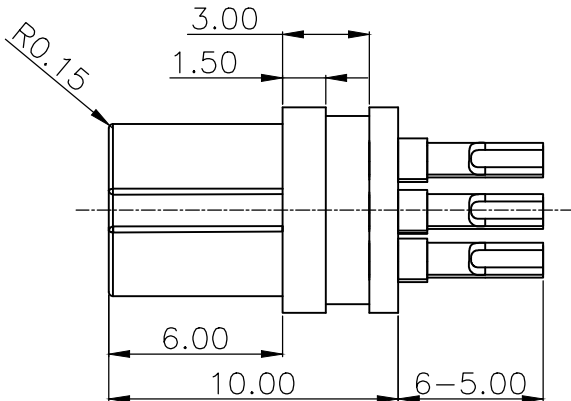
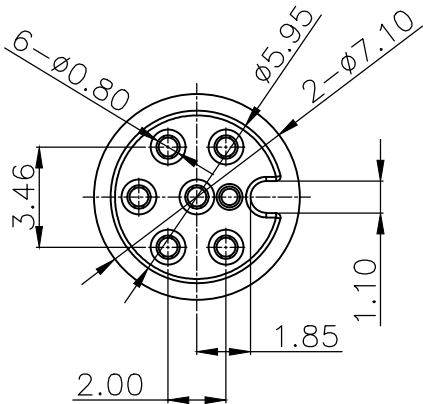
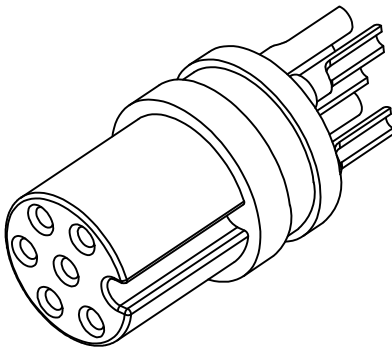


- NOTE:
- MATERIAL:
1-1 HOUSING:PA9T+GF,UL 94V-0, COLOR: VIOLET
1-2 TERMINAL:BRASS C3604
 - PLATING: AU UNDERPLATED 50u" MIN. NICKEL
 - CHARACTERISTICS:
3-1: RATED VOLTAGE: 48V AC / 60V DC
3-2: RATED CURRENT: 2A
3-3: CONTACT RESISTANCE: $\leq 10\text{m}\Omega$
3-4: INSULATION RESISTANCE: $\geq 20\text{M}\Omega$
3-5: DIELECTRIC VOLTAGE: 500V AC
3-6: DURABILITY: 200 CYCLES
3-7: TEMPERATURE RANGE: $-25\sim+80^{\circ}\text{C}$

RoHS2+HF	GOLD	98-00040-1081-0
	GOLD	98-00040-2081-0
GP TYPE	COATING	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		UNIT
							X. ± 0.50 X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.15 ANGEL $\pm 3^{\circ}$	6PIN SIGNAL CONNECTOR 母端(OD8)		mm
D	修改包裝規範	R2103083	Alfred	--		03-30'21	MATERIAL SEE NOTE FINISH SEE NOTE	ORIGINAL DATA		
	ADD PART NO.	R2102053	Alfred	--	Victor	03-12'21		11-27'20		
	RENEW PACKING	R2101017	Alfred	Victor	Victor	01-15'21		DWN. Kris	PART NO.	SCALE
	NEW DRAWING	--	Kris	Victor	Victor	11-27'20		CHK. Victor	SEE TABLE	1:1
	REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.		APVD. Victor	DWG. NO.	SHEET
							C-98-0004X		1 of 2	

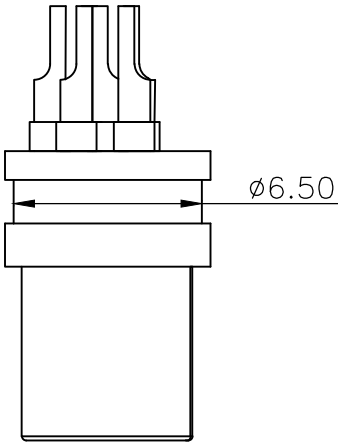