
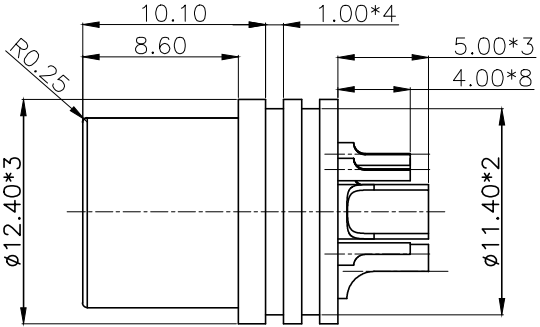
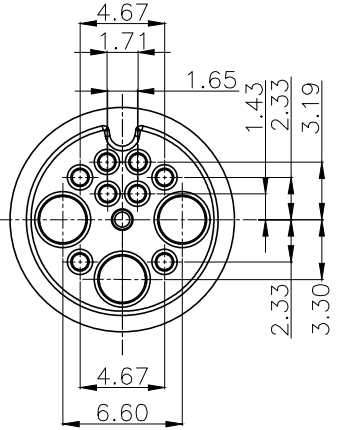
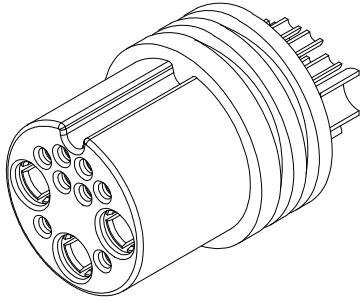
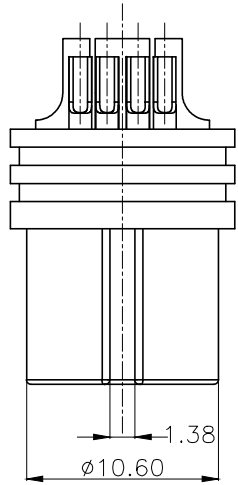


- NOTE:
- 1. MATERIAL:
 - 1-1 HOUSING:PA9T+GF,UL 94V-0, COLOR: BLACK
 - 1-2 TERMINAL:BRASS C3604
 - 2. PLATING: AG 20u" MIN. UNDERPLATED 50u" MIN. NICKEL
 - 3. CHARACTERISTICS:
 - 3-1: RATED VOLTAGE: 48V AC / 60V DC
 - 3-2: RATED CURRENT: 25A / 2A
 - 3-3: CONTACT RESISTANCE: ≤10mΩ
 - 3-4: INSULATION RESISTANCE: ≥ 20MΩ
 - 3-5: DIELECTRIC VOLTAGE: 500V AC
 - 3-6: DURABILITY: 200 CYCLES
 - 3-7: TEMPERATURE RANGE: -25~+80°C

RoHS2+HF	20 u"	98-00060-A001-0
GP TYPE	MIN.SILVER THICKNESS	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE			UNIT
							X. ±0.50	3+8 PIN CONNECTOR			mm
							X.X ±0.30	ORIGINAL DATA			
							X.XX ±0.20	11-27'20			
							X.XXX ±0.15	DWN. Kris			
							ANGEL ±3°	CHK. Victor			
							MATERIAL	PART NO.			
							SEE NOTE	98-00060-A001-0			
							FINISH	DWG. NO.			
							SEE NOTE	C-98-0006X			
								SCALE 1:1			
								SIZE A3			
								REV. C			
								SHEET 1 of 2			

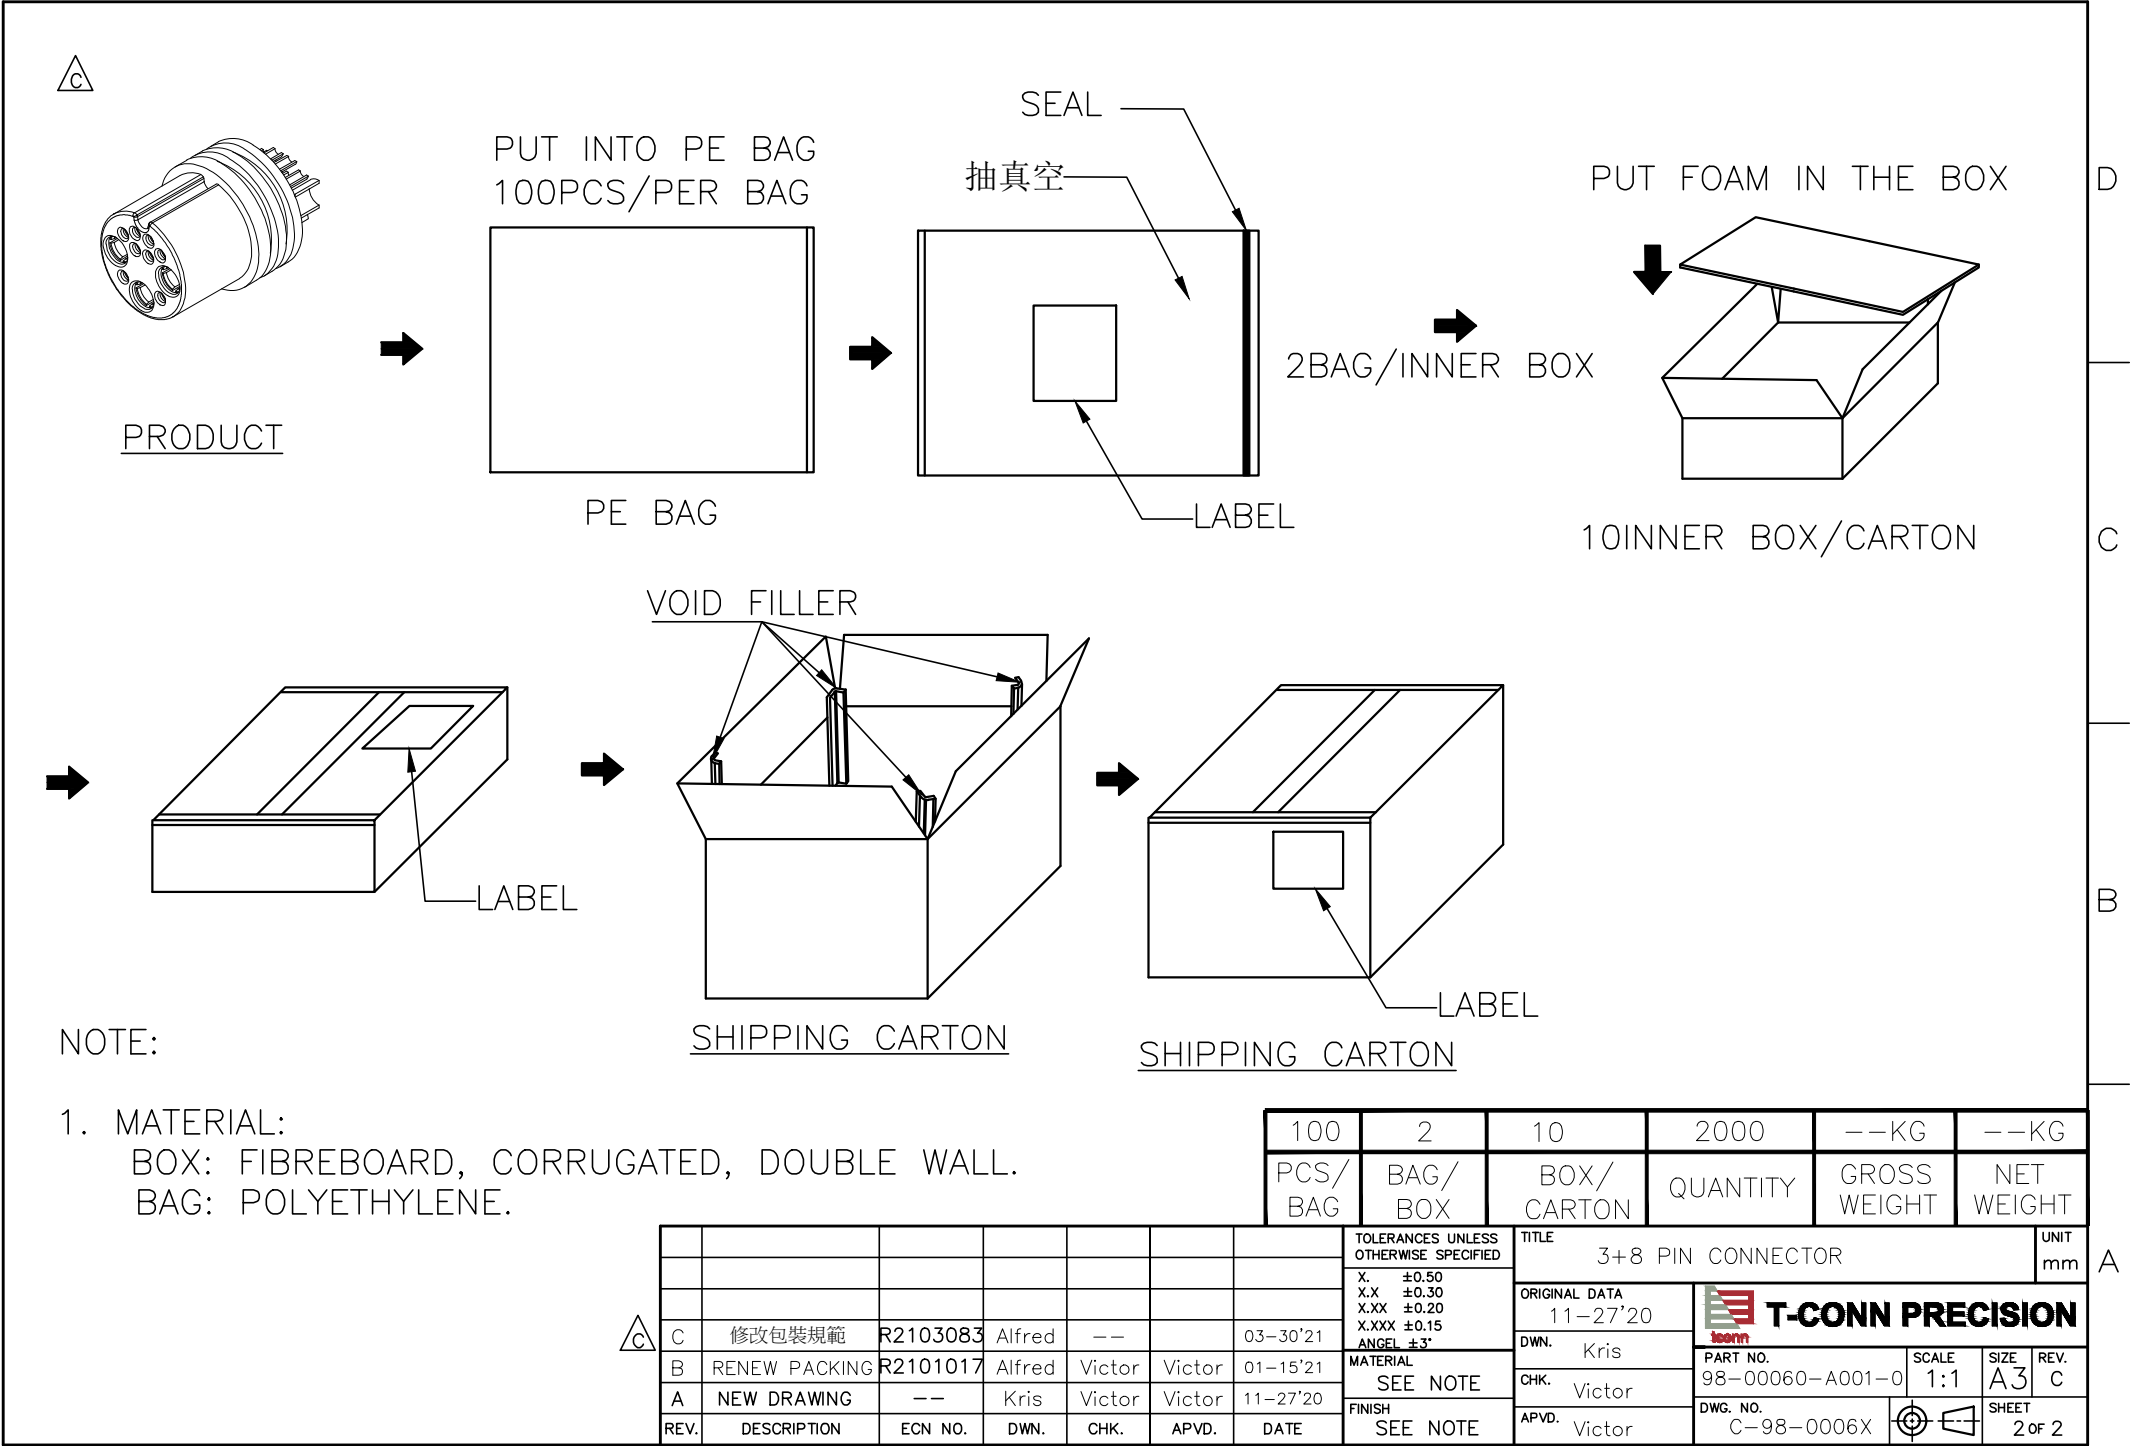

100	2	10	2000	--KG	--KG
PCS/ BAG	BAG/ BOX	BOX/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

							TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE		UNIT
							X. ±0.50		3+8 PIN CONNECTOR		mm
							X.X ±0.30		ORIGINAL DATA		
							X.XX ±0.20		11-27'20		
							X.XXX ±0.15		DWN. Kris		
							ANGEL ±3°		CHK. Victor		
							MATERIAL		APVD. Victor		
							SEE NOTE		PART NO.		
							FINISH		98-00060-A001-0		
							SEE NOTE		DWG. NO.		
									C-98-0006X		
									SCALE 1:1		
									SIZE A3		
									REV. C		
									SHEET 2 of 2		