
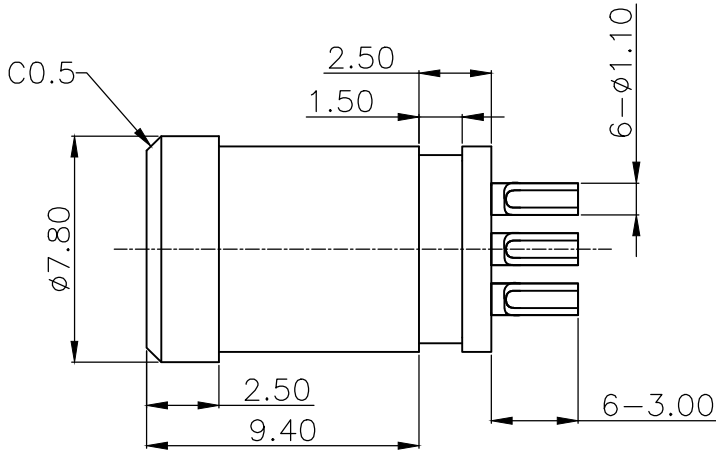
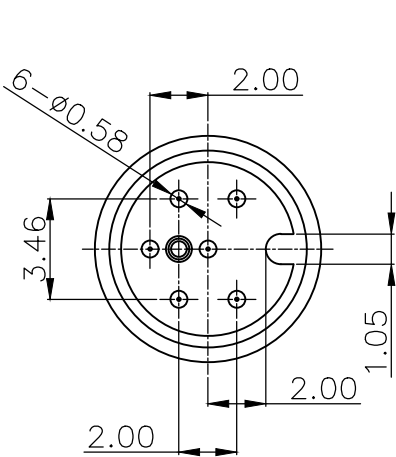
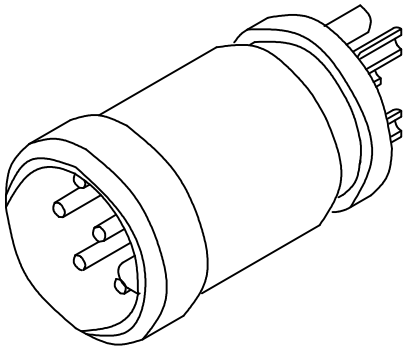


- NOTE:
- MATERIAL:
1-1 HOUSING:PA9T+GF,UL 94V-0, COLOR: VIOLET
1-2 TERMINAL:BRASS C3604
 - PLATING: AU UNDERPLATED 50u" MIN. NICKEL
 - CHARACTERISTICS:
3-1: RATED VOLTAGE: 48V AC / 60V DC
3-2: RATED CURRENT: 2A
3-3: CONTACT RESISTANCE: $\leq 10\text{m}\Omega$
3-4: INSULATION RESISTANCE: $\geq 20\text{M}\Omega$
3-5: DIELECTRIC VOLTAGE: 500V AC
3-6: DURABILITY: 200 CYCLES
3-7: TEMPERATURE RANGE: $-25\sim+80^{\circ}\text{C}$

RoHS2+HF	GOLD	98-00110-1081-0
	GOLD	98-00110-2081-0
GP TYPE	COATING	PART NUMBER

						TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE 6PIN SIGNAL CONNECTOR 公端(OD8)					UNIT mm		
D	D	修改包裝規範	R2103083	Alfred	--	03-30'21	X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3'	ORIGINAL DATA 11-27'20	 T-CONN PRECISION					
	C	ADD PART NO.	R2102053	Alfred	--	Victor	03-12'21	DWN.		Kris	PART NO.	SCALE 1:1	SIZE A3	REV. D
	B	RENEW PACKING	R2101017	Alfred	Victor	Victor	01-15'21	MATERIAL		CHK.	Victor			
	A	NEW DRAWING	--	Kris	Victor	Victor	11-27'20	SEE NOTE		APVD.	Victor	DWG. NO. C-98-0011X	SHEET 1 of 2	
	REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE	SEE NOTE						

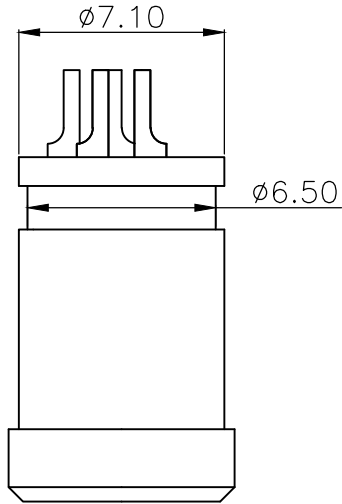