
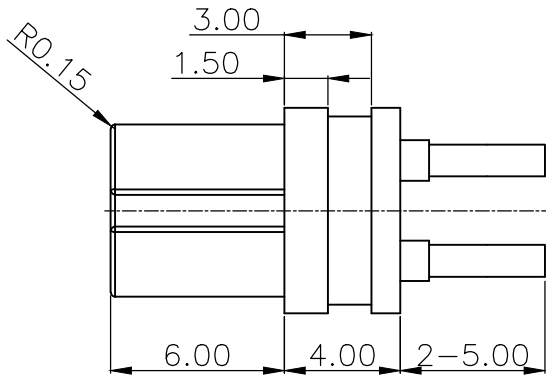
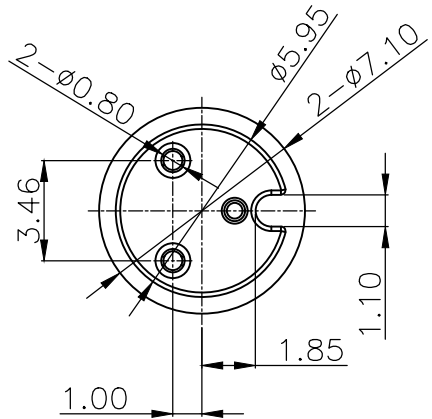
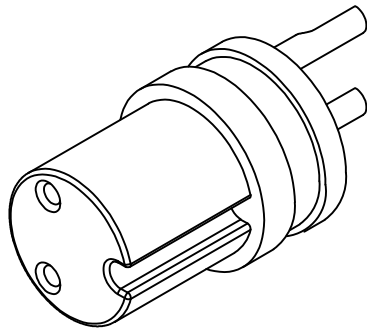
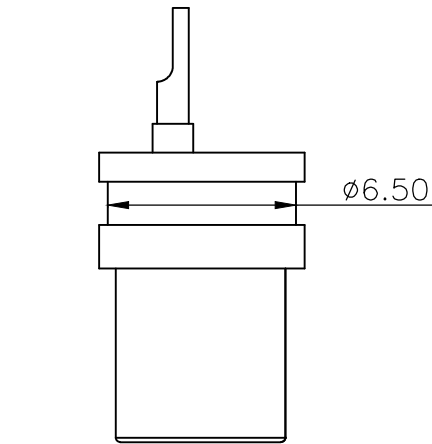


- NOTE:
1. MATERIAL:
1-1 HOUSING:PA9T+GF,UL 94V-0, COLOR: RED
1-2 TERMINAL:BRASS C3604
 2. PLATING: AU UNDERPLATED 50u" MIN. NICKEL
 3. CHARACTERISTICS:
3-1: RATED VOLTAGE: 48V AC / 60V DC
3-2: RATED CURRENT: 2A
3-3: CONTACT RESISTANCE: $\leq 10\text{m}\Omega$
3-4: INSULATION RESISTANCE: $\geq 20\text{M}\Omega$
3-5: DIELECTRIC VOLTAGE: 500V AC
3-6: DURABILITY: 200 CYCLES
3-7: TEMPERATURE RANGE: $-25\sim+80^{\circ}\text{C}$

RoHS2+HF	GOLD	98-00240-1031-0
GP TYPE	COATING	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE			UNIT
							X. ± 0.50	2PIN SIGNAL CONNECTOR 母端(OD8)			mm
							X.X ± 0.30	ORIGINAL DATA			
							X.XX ± 0.20	03-25'21			
							X.XXX ± 0.15	DWN. Alfred			
							ANGEL $\pm 3^{\circ}$	CHK. --			
							MATERIAL	APVD. Victor			
							SEE NOTE	PART NO. 98-00240-1031-0			
							FINISH	SCALE 1:1			
							SEE NOTE	SIZE A3			
								REV. B			
								DWG. NO. C-98-0024X			
								SHEET 1 OF 2			

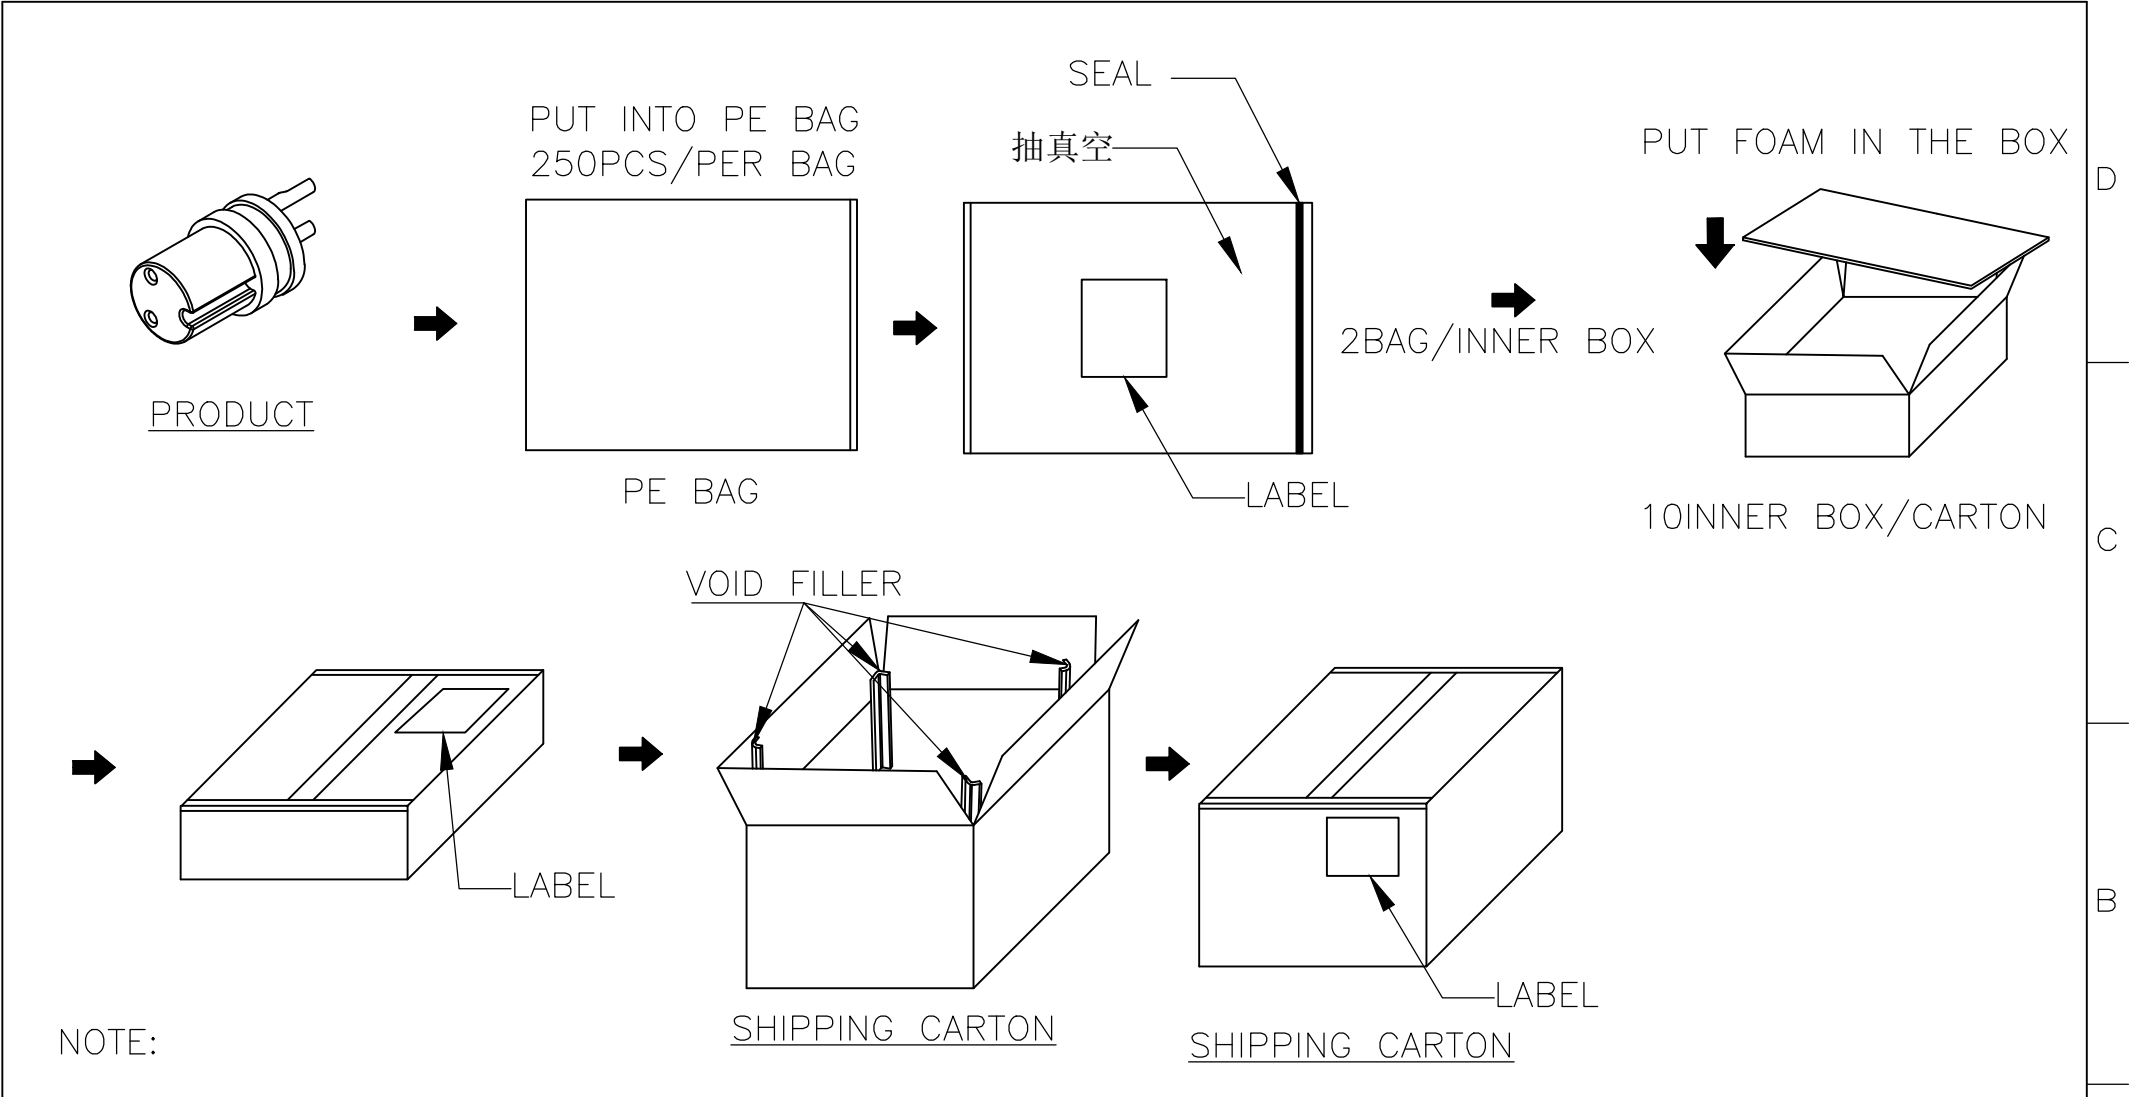

NOTE:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
BAG: POLYETHYLENE.

250	2	10	5000	--KG	--KG
PCS/ BAG	BAG/ BOX	BOX/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

							TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE		UNIT
							X. ±0.50		2PIN SIGNAL CONNECTOR 母端 (OD8)		mm
							X.X ±0.30		ORIGINAL DATA		
							X.XX ±0.20		03-25'21		
							X.XXX ±0.15		DWN. Alfred		
							ANGEL ±3°		CHK. --		
							MATERIAL		APVD. Victor		
							SEE NOTE		PART NO.		
							FINISH		98-00240-1031-0		
							SEE NOTE		DWG. NO.		
									C-98-0024X		
									SCALE 1:1		
									SIZE A3		
									REV. B		
									SHEET 2 OF 2		