
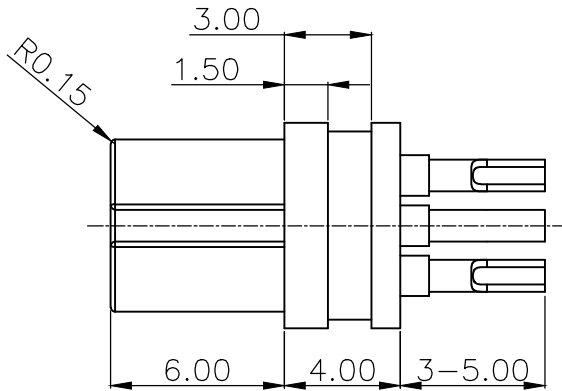
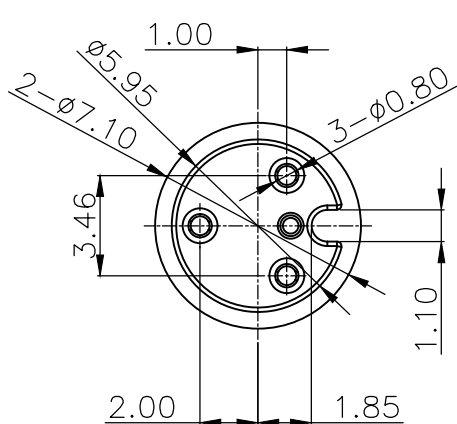
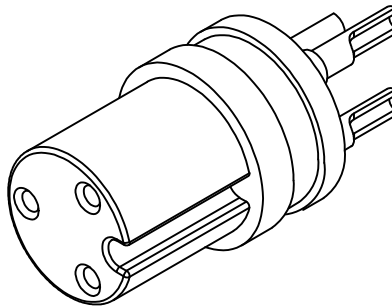
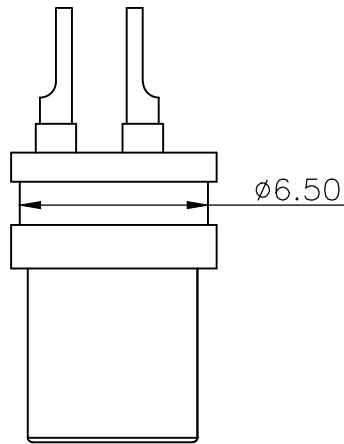


NOTE:

1. MATERIAL:
1-1 HOUSING:PA9T+GF,UL 94V-0, COLOR: YELLOW
1-2 TERMINAL:BRASS C3604
2. PLATING: AU UNDERPLATED 50u" MIN. NICKEL
3. CHARACTERISTICS:
3-1: RATED VOLTAGE: 48V AC / 60V DC
3-2: RATED CURRENT: 2A
3-3: CONTACT RESISTANCE: $\leq 10\text{m}\Omega$
3-4: INSULATION RESISTANCE: $\geq 20\text{M}\Omega$
3-5: DIELECTRIC VOLTAGE: 500V AC
3-6: DURABILITY: 200 CYCLES
3-7: TEMPERATURE RANGE: $-25\sim+80^{\circ}\text{C}$

RoHS2+HF	GOLD	98-00260-1041-0
GP TYPE	COATING	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		UNIT
							X. ± 0.50 X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.15 ANGEL $\pm 3^{\circ}$	3PIN FEMALE SIGNAL CONNECTOR		mm
							MATERIAL	ORIGINAL DATA	 T-CONN PRECISION	
							SEE NOTE	03-25'21		
							FINISH	DWN. Alfred	PART NO.	SCALE
							SEE NOTE	CHK. --	98-00260-1041-0	1:1
								APVD. Victor	DWG. NO.	SIZE
									C-98-0026X	A3
										REV.
										B
										SHEET
										1 OF 2

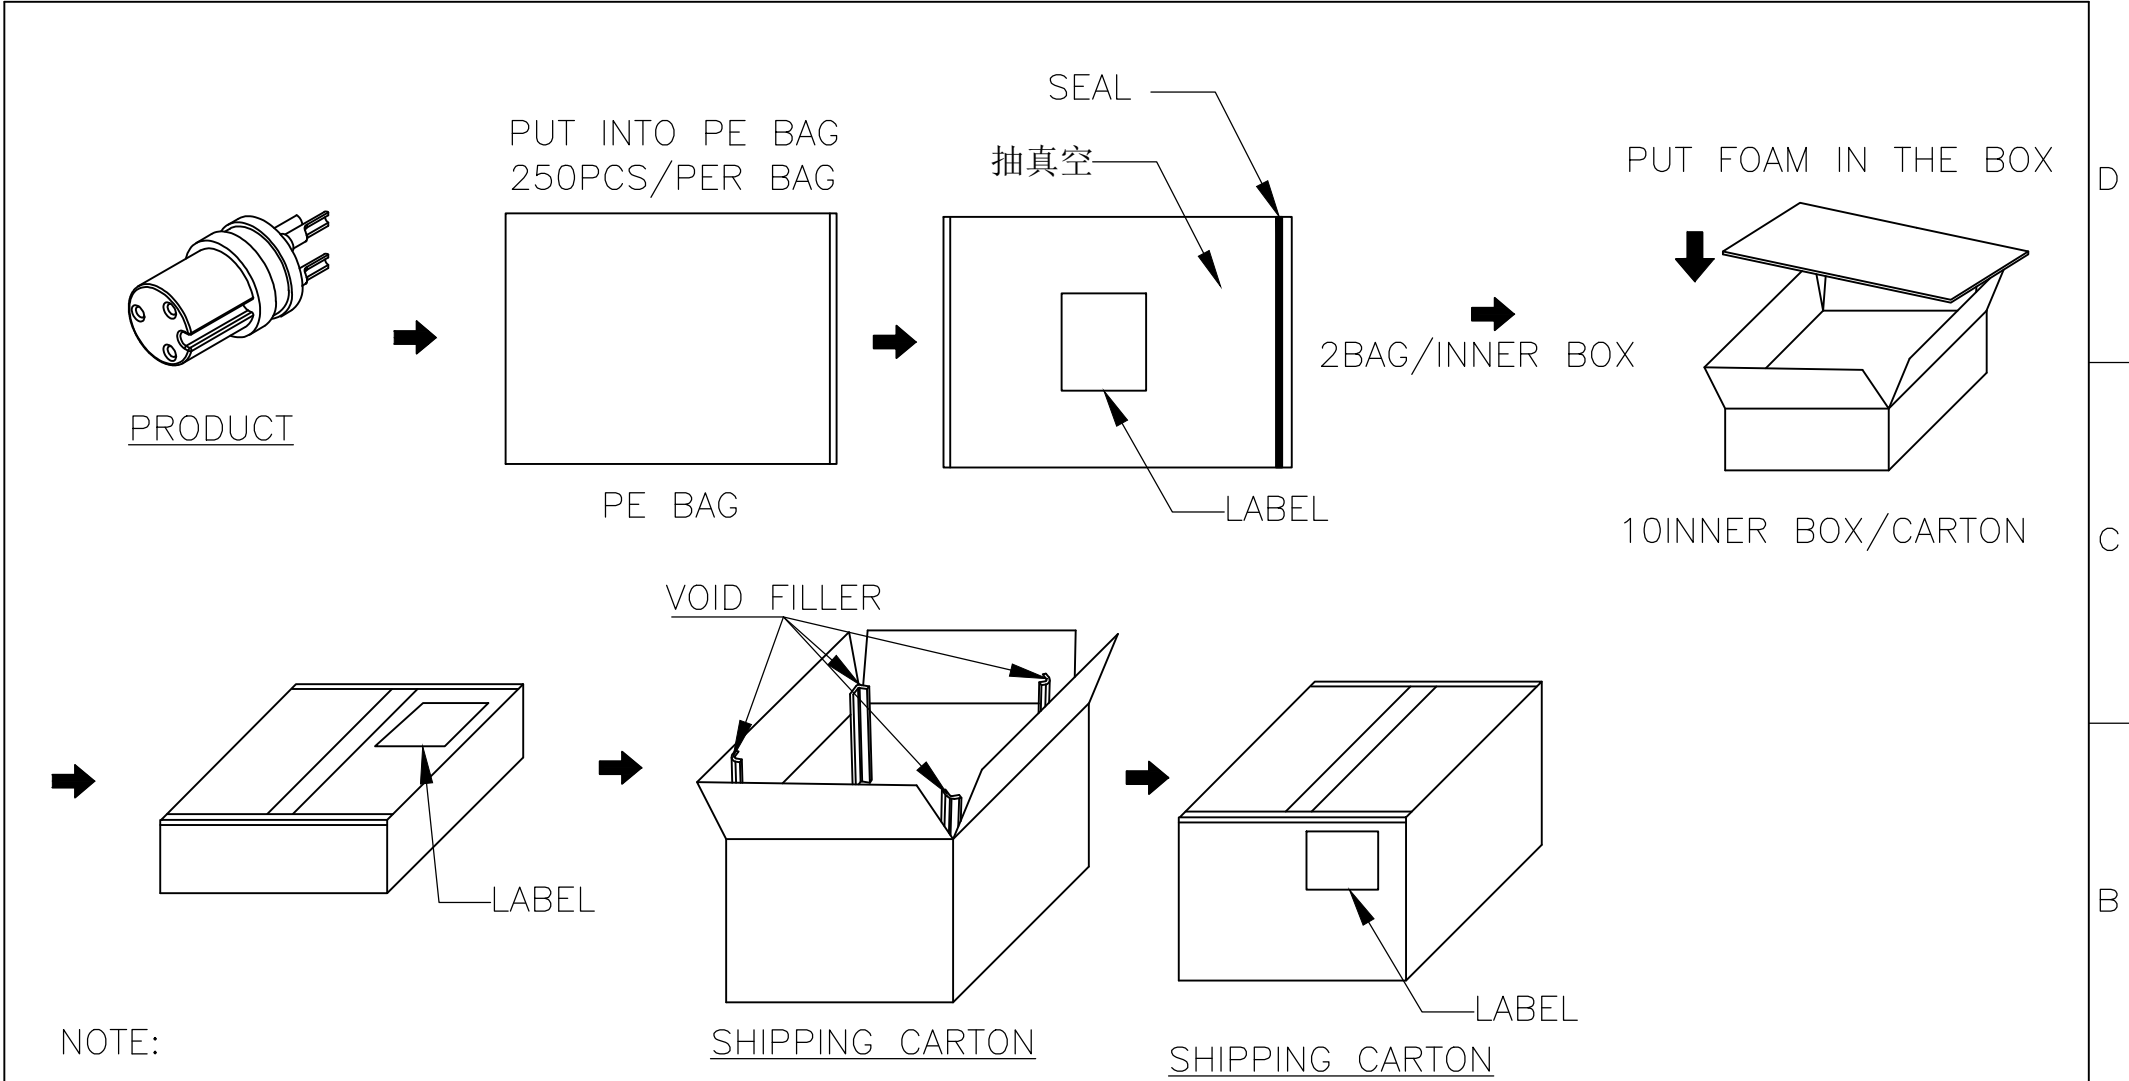

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
BAG: POLYETHYLENE.

250	2	10	5000	--KG	--KG
PCS/ BAG	BAG/ BOX	BOX/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

							TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE		UNIT
							X. ±0.50		3PIN FEMALE SIGNAL CONNECTOR		mm
							X.X ±0.30		ORIGINAL DATA		
							X.XX ±0.20		03-25'21		
							X.XXX ±0.15		DWN. Alfred		
							ANGEL ±3°		CHK. --		
							MATERIAL		APVD. Victor		
							SEE NOTE		PART NO.		
							FINISH		98-00260-1041-0		
							SEE NOTE		DWG. NO.		
									C-98-0026X		
									SCALE 1:1		
									SIZE A3		
									REV. B		
									SHEET 2 OF 2		