

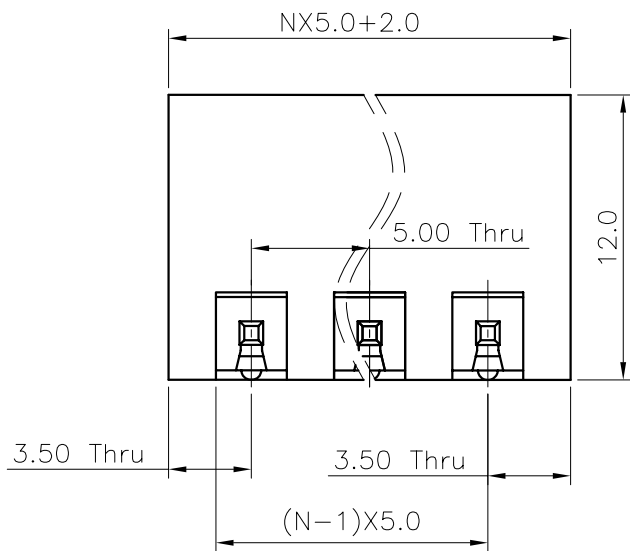


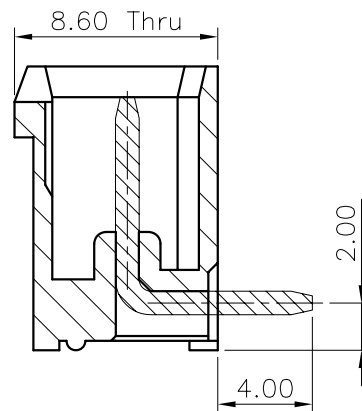

N=Number of contacts

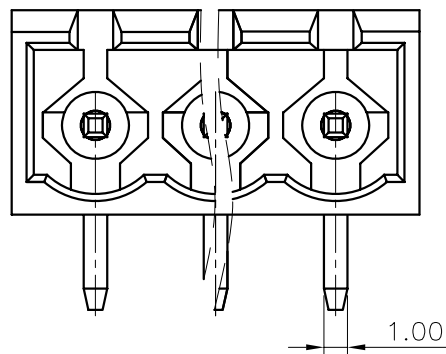

Technical Data:

Material:

Solder Pin: Copper Alloy, Tin plated

Insulator body(housing): Polyamide

(Glass filled)(UL94V-0) COLOR:PANTON 357C

Electrical

Voltage rating: 300VAC


Current rating: 16A

Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to +105°C

Soldering temperature:+250°C,5seconds Max.

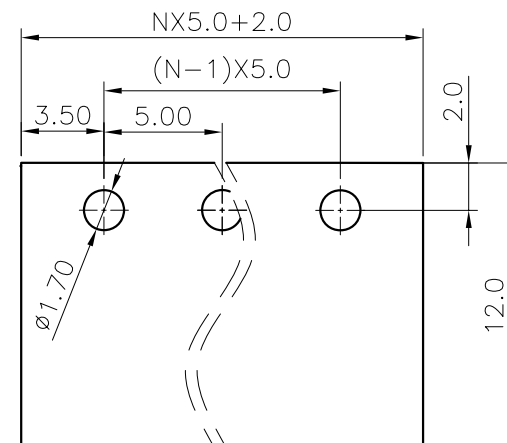


P.C.B. LAYOUT TOLERANCE = ±0.05



7PIN	RoHS	TIN	99-00834-B054-A
3PIN	RoHS	TIN	99-00833-B054-A
2PIN	RoHS	TIN	99-00830-B054-A
PINS	GP TYPE	PLATING	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE Male Terminal Block 5.0mm pitch				UNIT mm
							X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3°	ORIGINAL DATA 04-03'15				
								DWN. Peiyun				
C	新增7PIN 規格	N1807272	Xinling			07-12'18	MATERIAL SEE NOTE	CHK. Jimmy	PART NO.	SCALE 1 : 1	SIZE A3	REV. C
B	變更包裝數量	N1702042	Huan_P	Jimmy	Kevin	02-14'17		FINISH SEE NOTE	APVD. Kevin	SEE TABLE		
A	FIRST RELEASED	N1504119	Peiyun	Jimmy	Kevin	04-03'15			DWG. NO. C-99-0083X		SHEET 1 OF 2	
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE						

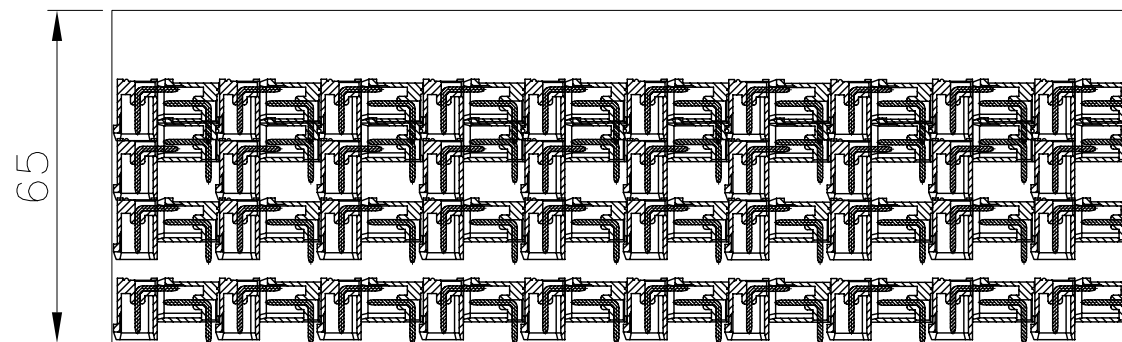

△	7pin	240	960	2880	11.21Kg	8.526Kg
	3pin	400	1600	4800	8.678Kg	6.346Kg
	2pin	600	2400	7200	9.046Kg	6.714Kg
	pins	pcs/ inner box	inner box/ in box	pcs/ outside the box	gross weight	net weight

						TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE Male Terminal Block 5.0mm pitch				UNIT mm
						X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3°	ORIGINAL DATA 04-03'15				
C	新增7PIN 規格	N1807272	Xinling			07-12'18	DWN. Peiyun	PART NO.	SCALE 1 : 1	SIZE A3	REV. C
B	變更包裝數量	N1702042	Huan_P	Jimmy	Kevin	02-14'17	MATERIAL SEE NOTE	CHK. Jimmy	SEE NOTE		
A	FIRST RELEASED	N1504119	Peiyun	Jimmy	Kevin	04-03'15	FINISH SEE NOTE	APVD. Kevin	DWG. NO. C-99-0083X		SHEET 2 OF 2
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE					