




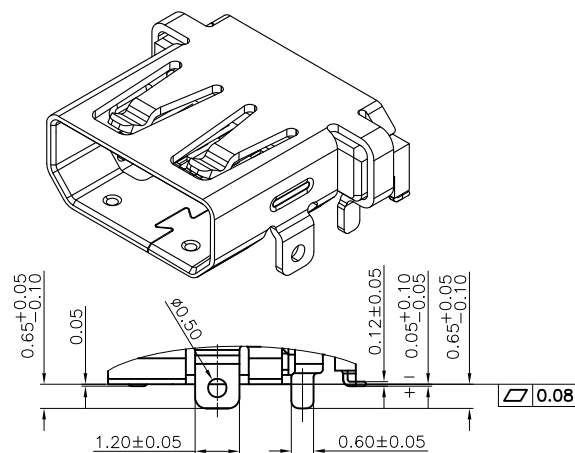

1. MATERIAL:
HOUSING: LCP UL94 V-0 COLOR:BLACK
CONTACTS: COPPER ALLOY
SHELL: STAINLESS STEEL
2. FINISH:
CONTACTS: (SEE TABLE)GOLD PLATED ON CONTACT AREA,
 MATTE-TIN ON SOLDER TAIL $100\mu''$ MIN
 WITH ENTIRE CONTACT UNDERPLATED $50\mu''$ MIN. NICKEL.
SHELL: $50\mu''$ MIN. NICKEL OVERALL.

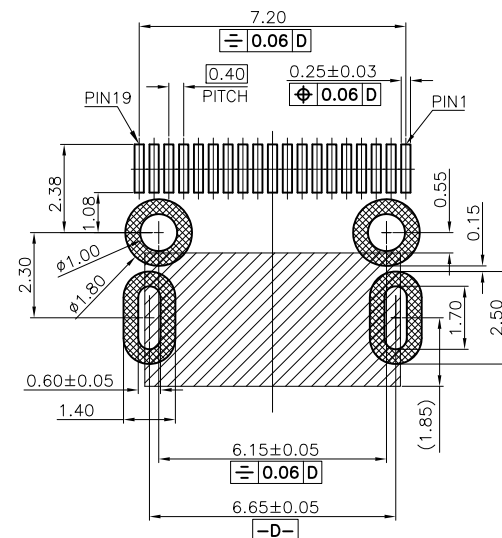



TOLERANCE: ± 0.05 , THICKNESS: 0.6mm
RECOMMENDED PCB LAYOUT
 (TOP VIEW)
: SHELL CONTACT AREA

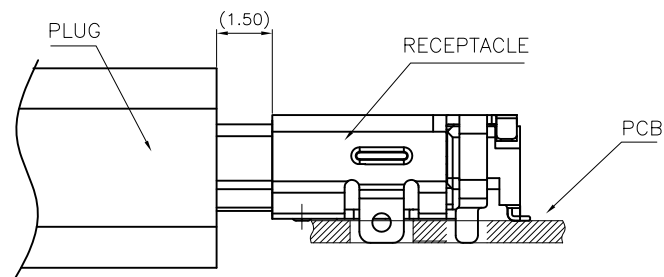

MATING DRAWING


RoHS2+HF	5μ"	16-D0480-2003-0
GP TYPE	MIN GOLD THICKNESS	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3° MATERIAL SEE NOTE FINISH SEE NOTE	TITLE HDMI D TYPE ,H=3.30MM,CH=1.40MM STD SMT TYPE(BSS-1)				UNIT mm
						ORIGINAL DATA 08-11'15						
						DWN. Hong		PART NO.	SCALE 1:1	SIZE A3	REV. 01	
01	FIRST RELEASED	--	Hong			08-11'15		CHK.	SEE NOTE			
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE		APVD.	DWG. NO. C-16-D048X		SHEET 1 OF 2	

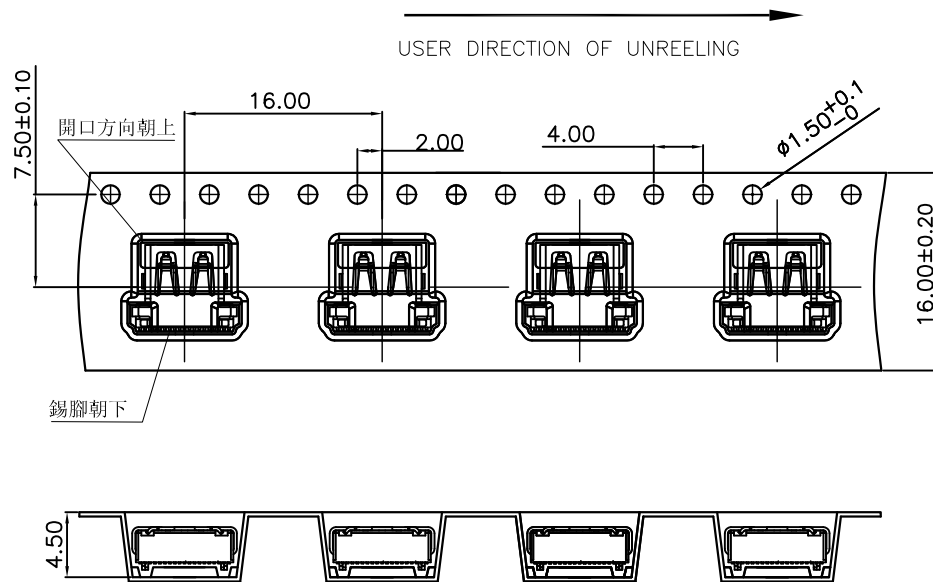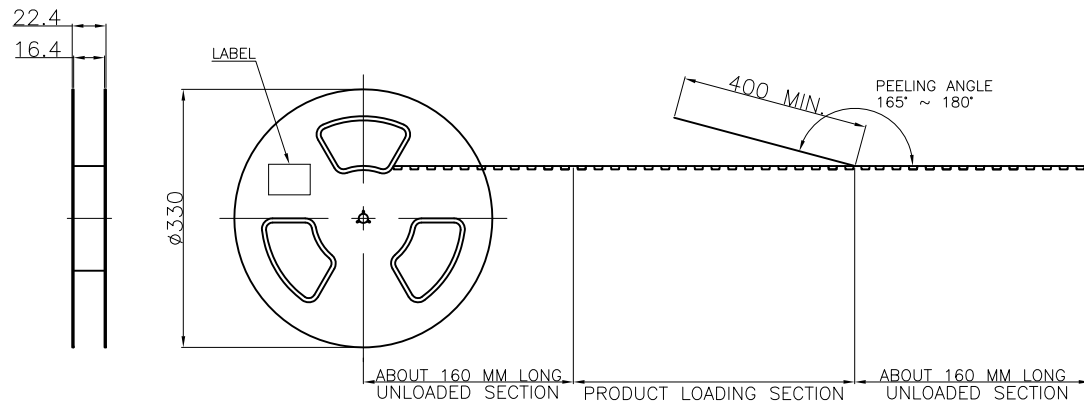

NOTE:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES,COLOR:WHITE.
REEL: POLYSTYRENES,BLUE COLOR.
BAG: POLYETHYLENE.
2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
3. PEELING SPEED: 300 mm/min.
4. EACH BAG SHALL BE INCLUDED DESICCANT.

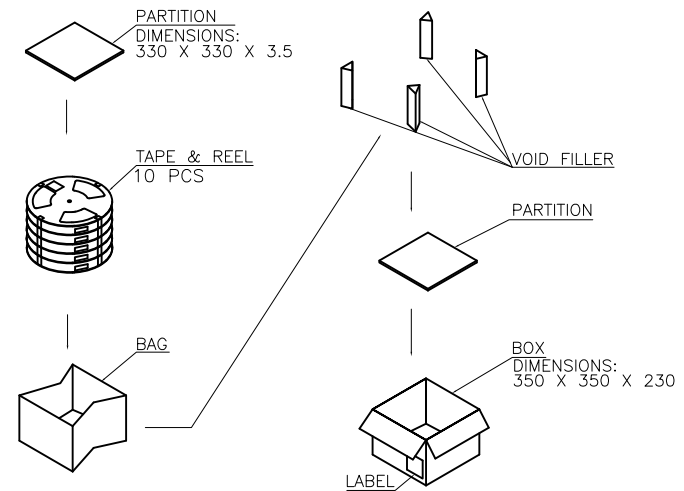

						TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE HDMI D TYPE ,H=3.30MM,CH=1.40MM STD SMT TYPE(BSS-1)				UNIT mm
						X. ±0.50	ORIGINAL DATA				
						X.X ±0.30	08-07'15				
						X.XX ±0.20	DWN. Hong				
						X.XXX ±0.15	CHK.				
						ANGEL ±3°	APVD.				
						MATERIAL SEE NOTE	PART NO. 16-D0480-2003-0				
						FINISH SEE NOTE	SCALE 1:1				
01	FIRST RELEASED	--	Hong		08-07'15		SIZE A3				
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE	SHEET 2 OF 2				
							DWG. NO. C-16-D048X				