
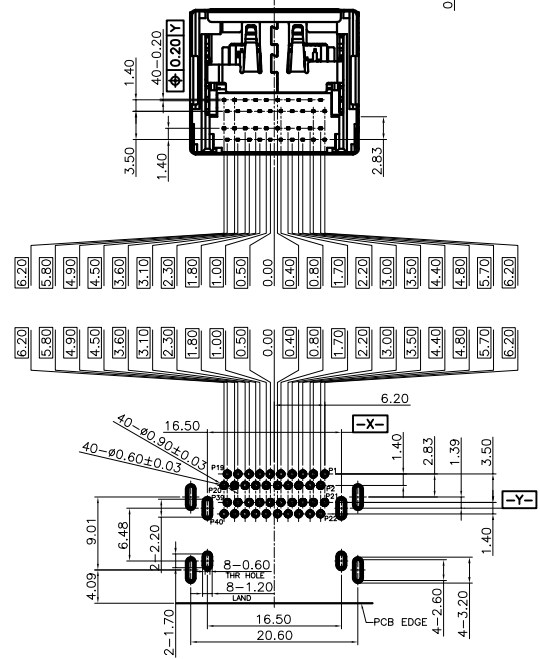
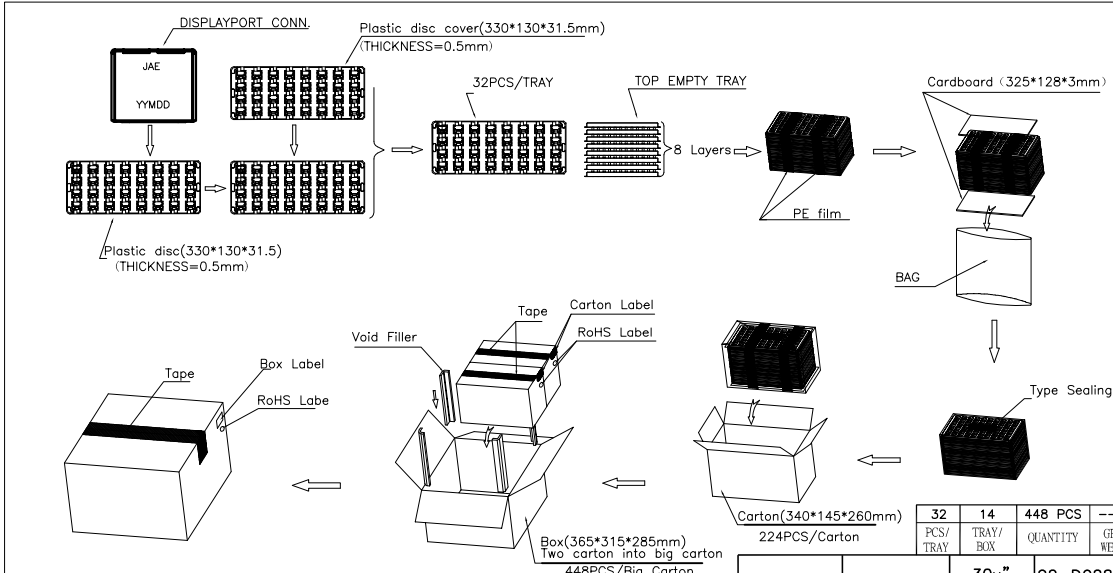
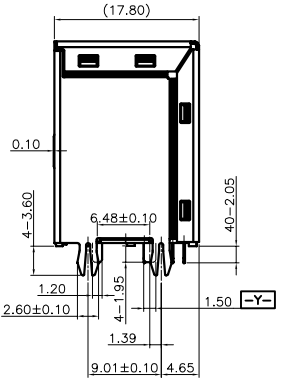


- NOTE:
- MATERIAL:
 - INSULATOR: LCP UL94V-0 BLACK
 - CONTACT: COPPER ALLOY
 - SHELL: SUS304
 - PLATING
 - TERMINAL CONTACT:
 - GOLD (SEE TABLE) PLATED ON CONTACT AREA ALL OVER 50u" MIN NICKEL AND 80u"MIN MATTE-Tin ALL OVER 50u" MIN NICKEL ON SOLDER AREA
 - SHELL:50u"MIN.NICEL UNDERPLATING OVER Sn 20u" MIN
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE:30mΩ MAXIMUM
 - CURRENT RATING:0.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - INSULATION RESISTANCE:UNMATERD 100M Ω MIN MATED:10M Ω MIN
 - OPERATING TEMPERATURE:-40°C~85°C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE:4.5kgf MAX
 - UNMATED FORCE:1.0~4.0kgf
 - DURABILITY:5,000 CYCLES

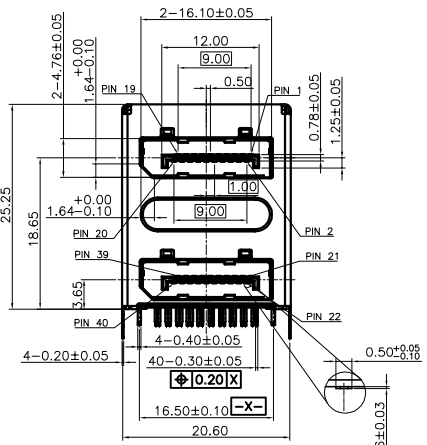

RECOMMENDED P.C.B.LAYOUT(COMPONENT SIDE VIEW)
 TOL IS ±0.05 THK=1.60 ALL POSITION TOL (0.05mm)

05	新增G/F鍍金料號	N1807285	Songfeng			07-20'18
04	修改IR單位	N1508289	XINYE	Jimmy	Kevin	08-25'15
03	新增30u"料號	N1508263	XINYE	Jimmy	Kevin	08-11'15
02	變更LOGO及D/C	N1505156	ZongShun	Jimmy	Kevin	05-11'15
01	FIRST RELEASED	--	XINYE	Jimmy	Kevin	03-25'15
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED	X. ±0.50
	X.X ±0.30
	X.XX ±0.20
	X.XXX ±0.15
	ANGEL ±3°
MATERIAL	SEE NOTES
FINISH	SEE NOTES

TITLE		Display Port 40P H=25.25mm		UNIT	mm
ORIGINAL DATA		REC,STD DIP TYPE(DSP-6)			
03-25'15					
DWN.	XINYE	PART NO.	SCALE	SIZE	REV.
CHK.	Jimmy	SEE TABLE	1:1	A2	05
APVD.	Kevin	DWG. NO.	C-22-D028X	SHEET	1 OF 1

GP TYPE	LOGO	PLATING	PART NUMBER
RoHS2+HF	JAЕ LOGO	30u"	22-D0280-6201-0
	15u"		22-D0280-5201-0
	NO LOGO	15u"	22-D0280-5001-0
	G/F _{0.05}		22-D0280-1001-0