


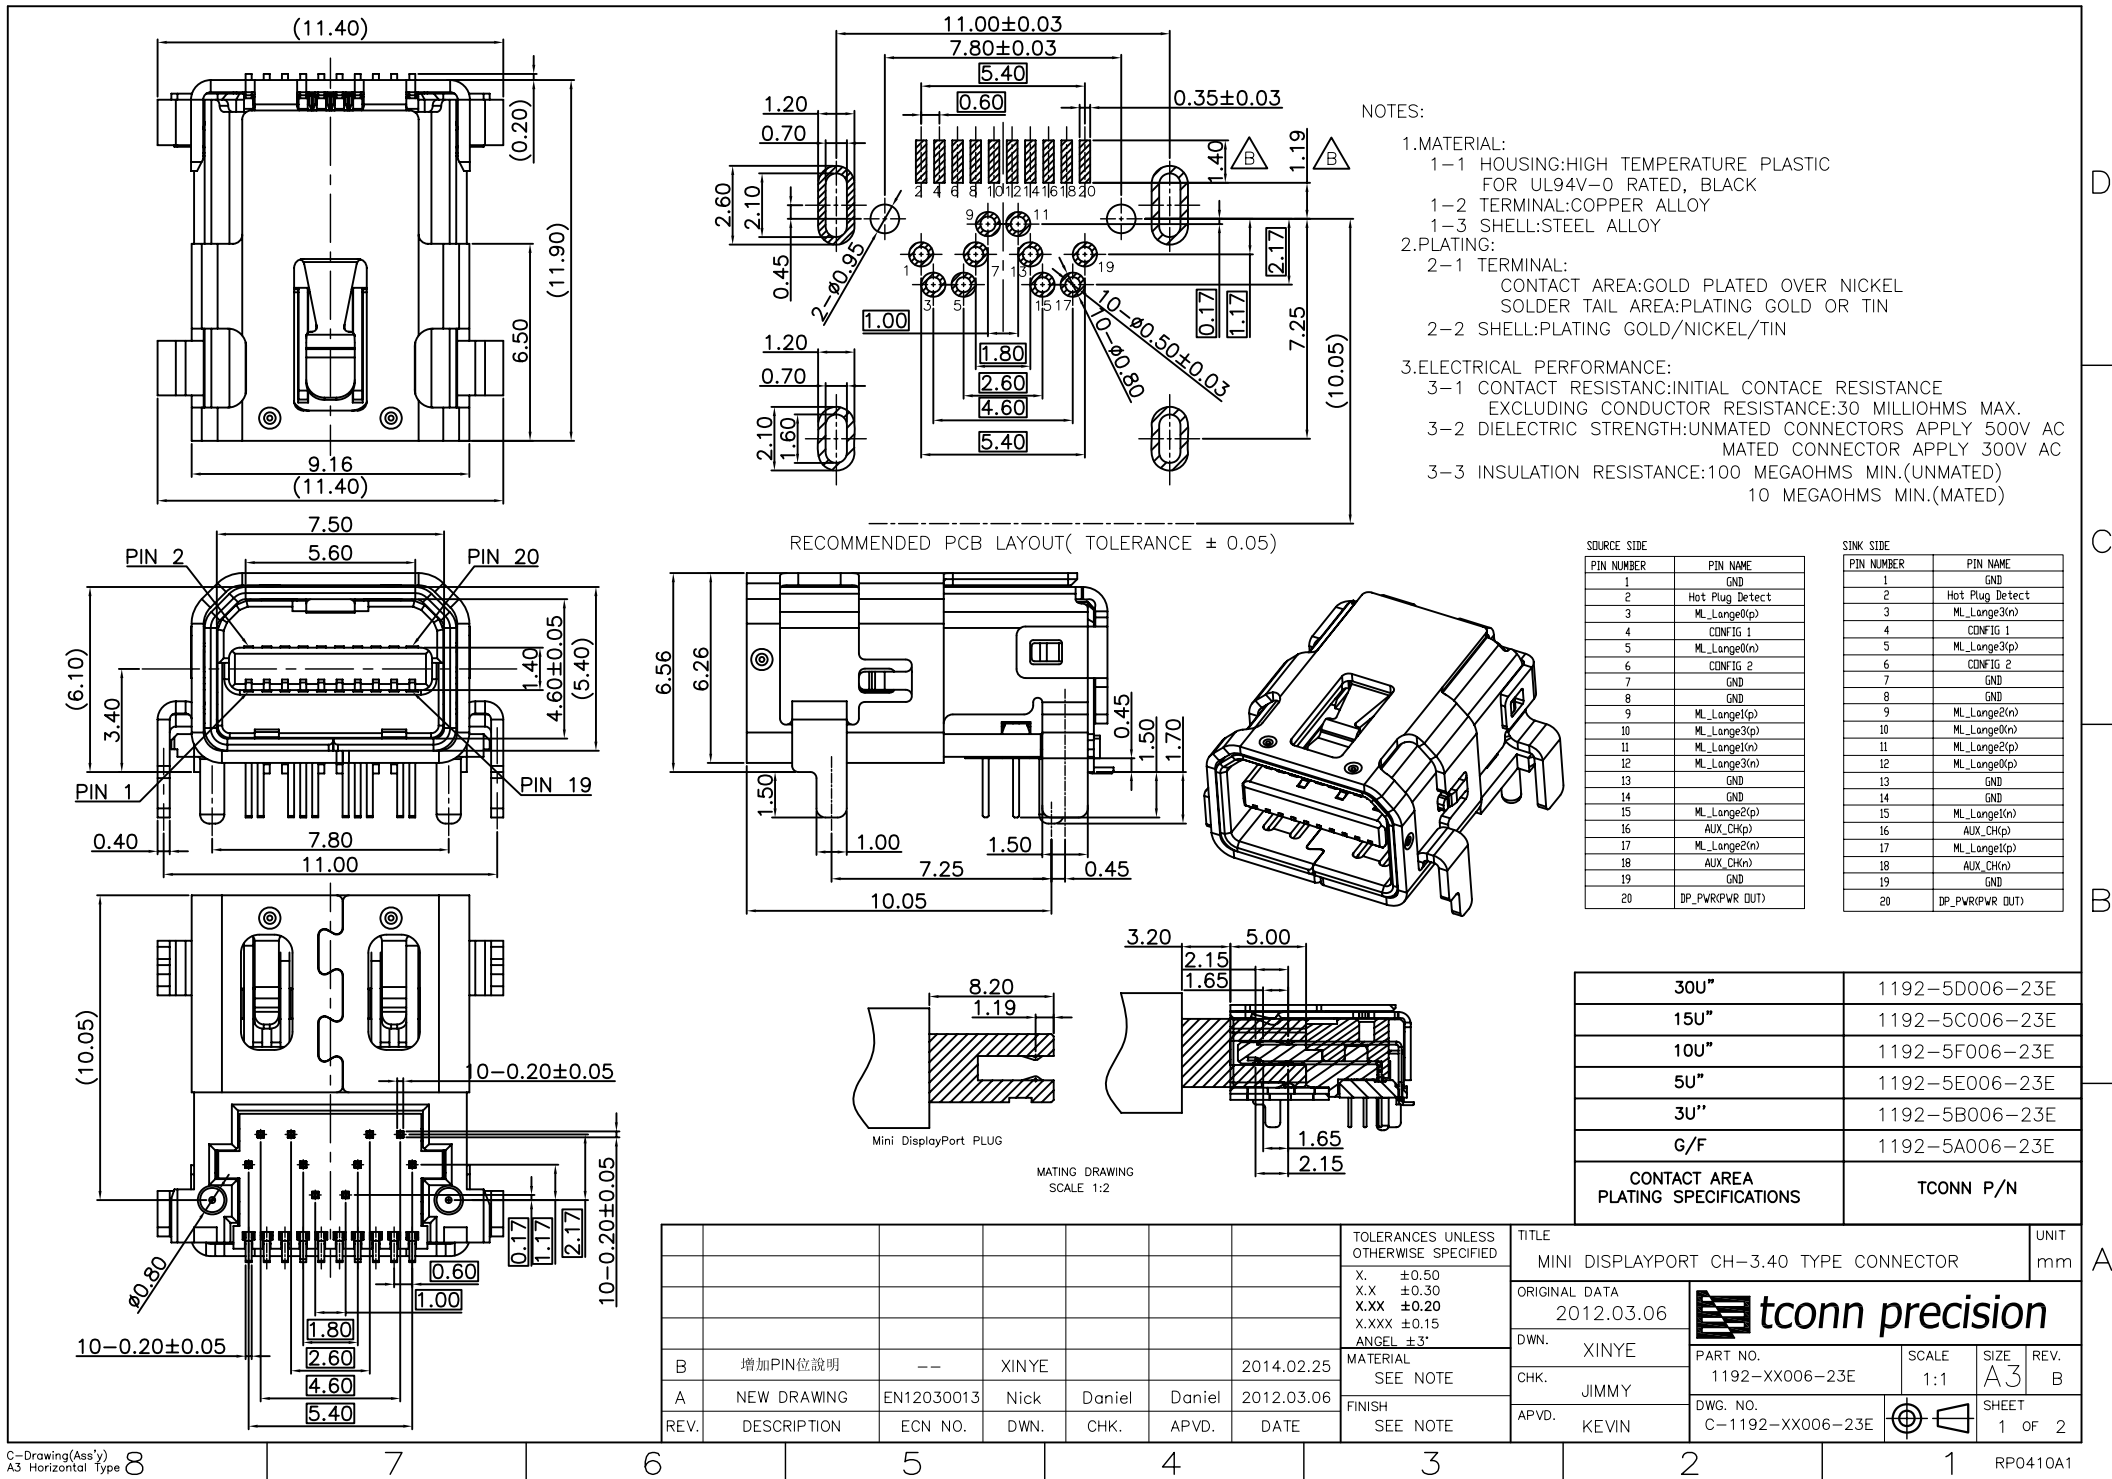

- NOTES:
- 1.MATERIAL:
1-1 HOUSING:HIGH TEMPERATURE PLASTIC
FOR UL94V-0 RATED, BLACK
1-2 TERMINAL:COPPER ALLOY
1-3 SHELL:STEEL ALLOY
- 2.PLATING:
2-1 TERMINAL:
CONTACT AREA:GOLD PLATED OVER NICKEL
SOLDER TAIL AREA:PLATING GOLD OR TIN
2-2 SHELL:PLATING GOLD/NICKEL/TIN
- 3.ELECTRICAL PERFORMANCE:
3-1 CONTACT RESISTANC:INITIAL CONTACE RESISTANCE
EXCLUDING CONDUCTOR RESISTANCE:30 MILLIOHMS MAX.
3-2 DIELECTRIC STRENGTH:UNMATED CONNECTORS APPLY 500V AC
MATED CONNECTOR APPLY 300V AC
3-3 INSULATION RESISTANCE:100 MEGAOHMS MIN.(UNMATED)
10 MEGAOHMS MIN.(MATED)

SOURCE SIDE		SINK SIDE	
PIN NUMBER	PIN NAME	PIN NUMBER	PIN NAME
1	GND	1	GND
2	Hot Plug Detect	2	Hot Plug Detect
3	ML_Lange0(p)	3	ML_Lange3(n)
4	CONFIG 1	4	CONFIG 1
5	ML_Lange0(n)	5	ML_Lange0(p)
6	CONFIG 2	6	CONFIG 2
7	GND	7	GND
8	GND	8	GND
9	ML_Lange1(p)	9	ML_Lange2(n)
10	ML_Lange3(p)	10	ML_Lange0(n)
11	ML_Lange1(n)	11	ML_Lange2(p)
12	ML_Lange3(n)	12	ML_Lange0(p)
13	GND	13	GND
14	GND	14	GND
15	ML_Lange2(p)	15	ML_Lange1(n)
16	AUX_CH(p)	16	AUX_CH(p)
17	ML_Lange2(n)	17	ML_Lange1(p)
18	AUX_CH(n)	18	AUX_CH(n)
19	GND	19	GND
20	DP_PWR(PWR OUT)	20	DP_PWR(PWR OUT)

30U"	1192-5D006-23E
15U"	1192-5C006-23E
10U"	1192-5F006-23E
5U"	1192-5E006-23E
3U"	1192-5B006-23E
G/F	1192-5A006-23E
CONTACT AREA PLATING SPECIFICATIONS	TCONN P/N

TOLERANCES UNLESS OTHERWISE SPECIFIED						TITLE		UNIT	
						MINI DISPLAYPORT CH-3.40 TYPE CONNECTOR		mm	
						ORIGINAL DATA		2012.03.06	
						DWN.		XINYE	
						CHK.		JIMMY	
						APVD.		KEVIN	
						MATERIAL		SEE NOTE	
						FINISH		SEE NOTE	
B	增加PIN位說明	--	XINYE		2014.02.25				
A	NEW DRAWING	EN12030013	Nick	Daniel	Daniel	2012.03.06			
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE			

