

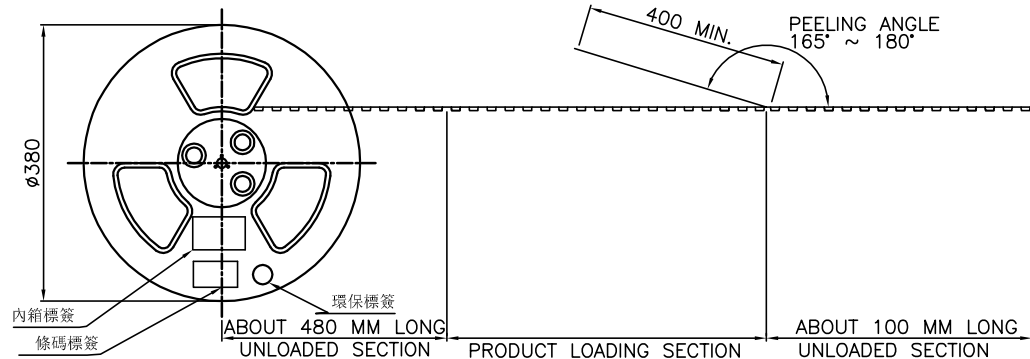

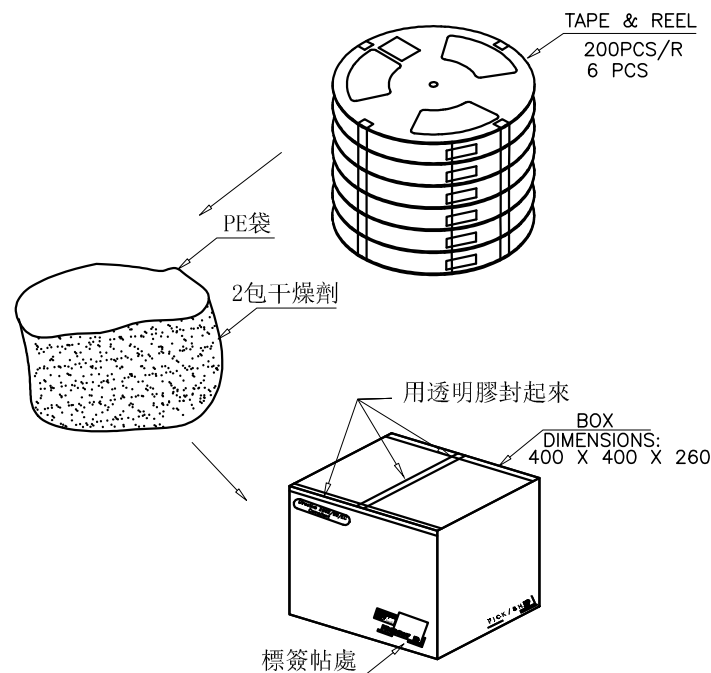
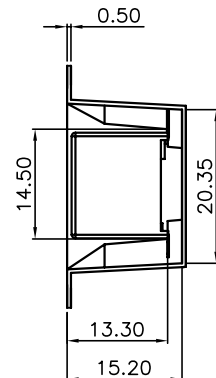





USER DIRECTION OF UNREELING

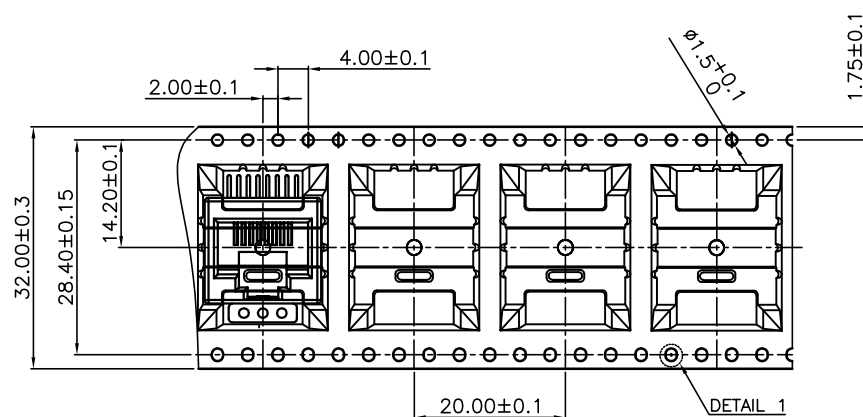

- NOTE:
1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES.
REEL: POLYSTYRENES,BLUE COLOR.
BAG: POLYETHYLENE.
 2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
 3. PEELING SPEED: 300 mm/min.
 4. EACH BAG SHALL BE INCLUDED DESICCANT.

200	6	1200 PCS	--KG	--KG
PCS/REEL	REELS/CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

						TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE		UNIT	
						X. ±0.50		RJ45 1X1 8P H=12.80mm,V/T SMT TYPE (RJ45-2)		mm	
						X.X ±0.30		ORIGINAL DATA			
						X.XX ±0.20		11-16'18			
						X.XXX ±0.15		DWN.		Songfeng	
						ANGEL ±3°		CHK.		Jimmy	
						MATERIAL		APVD.		Kevin	
						SEE NOTE		DWG. NO.		C-23-0202X	
						FINISH		SCALE		1 : 1	
								SIZE		A3	
								SHEET		2 OF 2	

B	CHANGE LAYOUT PAD AREA ADD SOLDER MASK AREA	N1907252	Zitao			07-11'19
A	FIRST RELEASED	--	Songfeng	Jimmy	Kevin	11-16'18
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE