

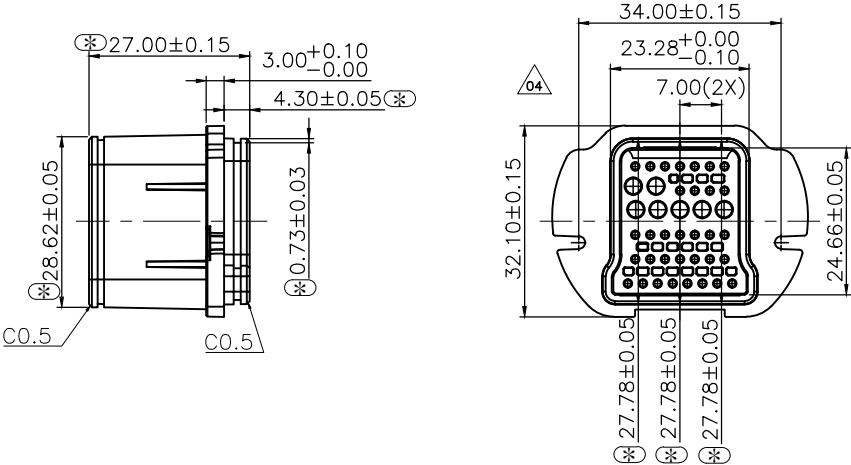


- NOTE :
- ELECTRICAL CHARACTERISTICS :
 - CONTACT RESISTANCE : 40mΩ MAX. FOR 33PIN SIGNAL CONTACTS AND 10mΩ MAX. FOR 7PIN POWER CONTACTS
 - DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC FOR 1 MINUTE.
 - INSULATION RESISTANCE : 500 VDC/100MΩ MAX.
 - CONTACT CURRENT RATING : 15A/2A SHALL BE APPLIED TO POWER/SIGNAL PIN. ΔT < 30℃
 - MECHANICAL CHARACTERISTICS :
 - INSERTION FORCE : 8KG(Max.)
 - EXTRACTION FORCE : 5KG(min.)
 - DURABILITY : 100 CYCLES.
 - OPERATING TEMPERATURE : -40℃ TO +85℃.
 - HOUSING MATERIAL : GN2450, PA9T ; COLOR : BLACK
CONTACT MATERIAL : COPPER ALLOY
 - PLATING OPTION :
CONTACT(SIGNAL) : GOLD PLATING 5u" MIN. ON , 50u" MIN. NICKEL UNDERPLATED OVERALL.
CONTACT(POWER) : GOLD PLATING 20u" MIN. ON , 50u" MIN. NICKEL UNDERPLATED OVERALL.
 - "⊛" SHOWS INSPECTION ITEMS.
 - PRODUCT FLAME RETARDANT LEVEL: UL94-V0.
 - FOR HAND SOLDERING PROCESS.
 - PACKAGING : TRAY.
 - DATE CODE: tconn YYMMDD

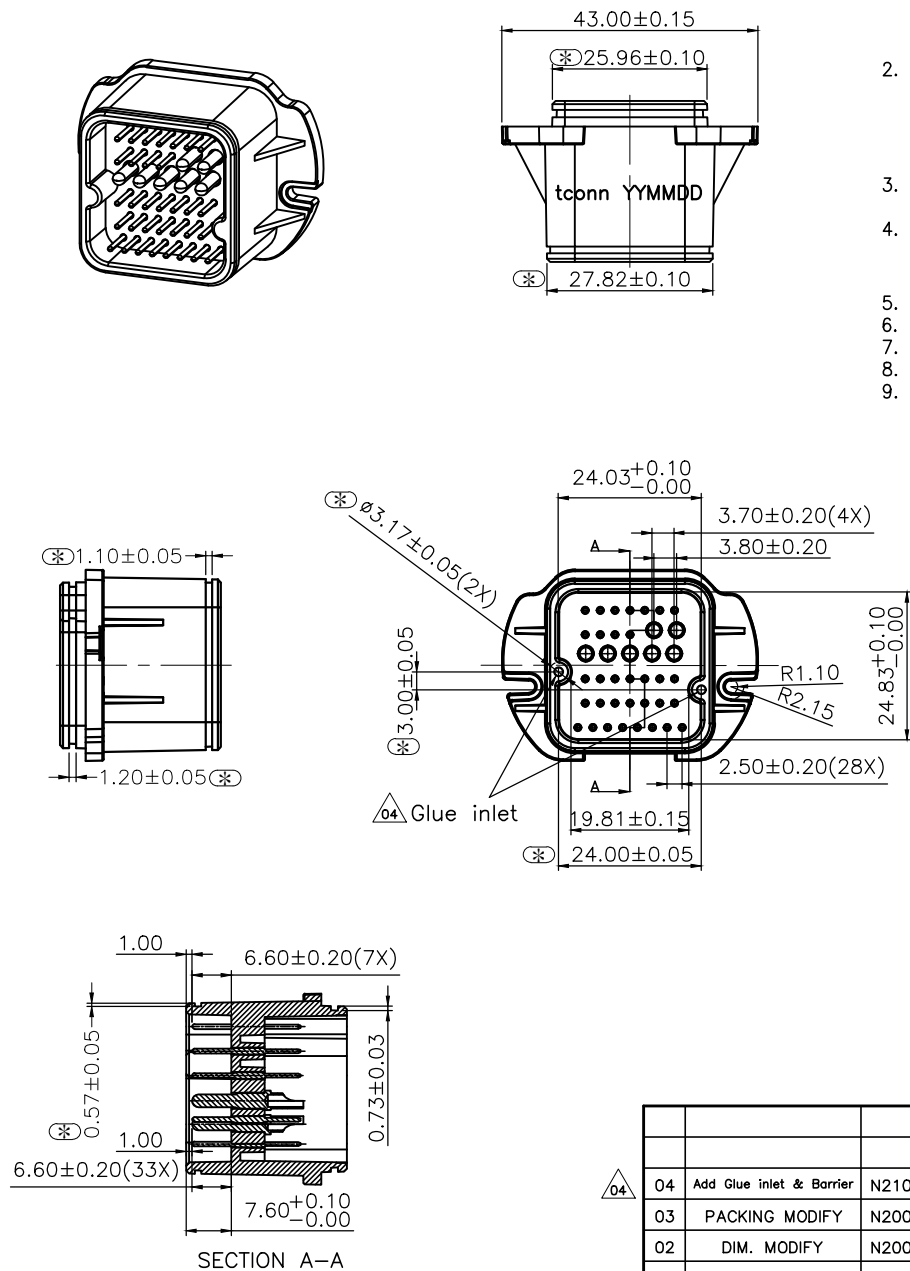

						TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		UNIT
						X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3°	CONNECTOR CART 7+33 PIN MALE		mm
						MATERIAL SEE TABLE	ORIGINAL DATA 11-13'19		
						FINISH SEE TABLE	DWN. Kuowei		
							CHK. --	PART NO. 20-01270-C001-0	SCALE 1 : 1
							APVD. Victor	DWG. NO. C-20-0127X	SIZE A3
								SHEET 1 OF 2	REV. 04
REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE			
04	Add Glue inlet & Barrier	N2104126	Hank Lu	--	Victor	05-11'21			
03	PACKING MODIFY	N2006129	Kuowei	--	Victor	06-09'20			
02	DIM. MODIFY	N2006121	Kuowei	--	Victor	06-01'20			
01	NEW DRAWING	--	Kuowei	--	Victor	03-18'20			

- NOTE :
- 1. MATERIAL :
BOX : FIBREBOARD, CORRUGATED, DOUBLE WALL.
TRAY : EXPANDED POLYETHYLENE FOAM, WHITE COLOR.
BAG : POLYETHYLENE,
 - 2. EACH BAG SHALL BE INCLUDED DESICCANT.
 - 3. DIMENSION:
TRAY : 330*330*35
CARTON : L=345,W=345,H=335
 - 4. QUANTITY:
30 PCS/TRAY
9 PCS TRAYS/CARTON
270 PCS PRODUCT/CARTON

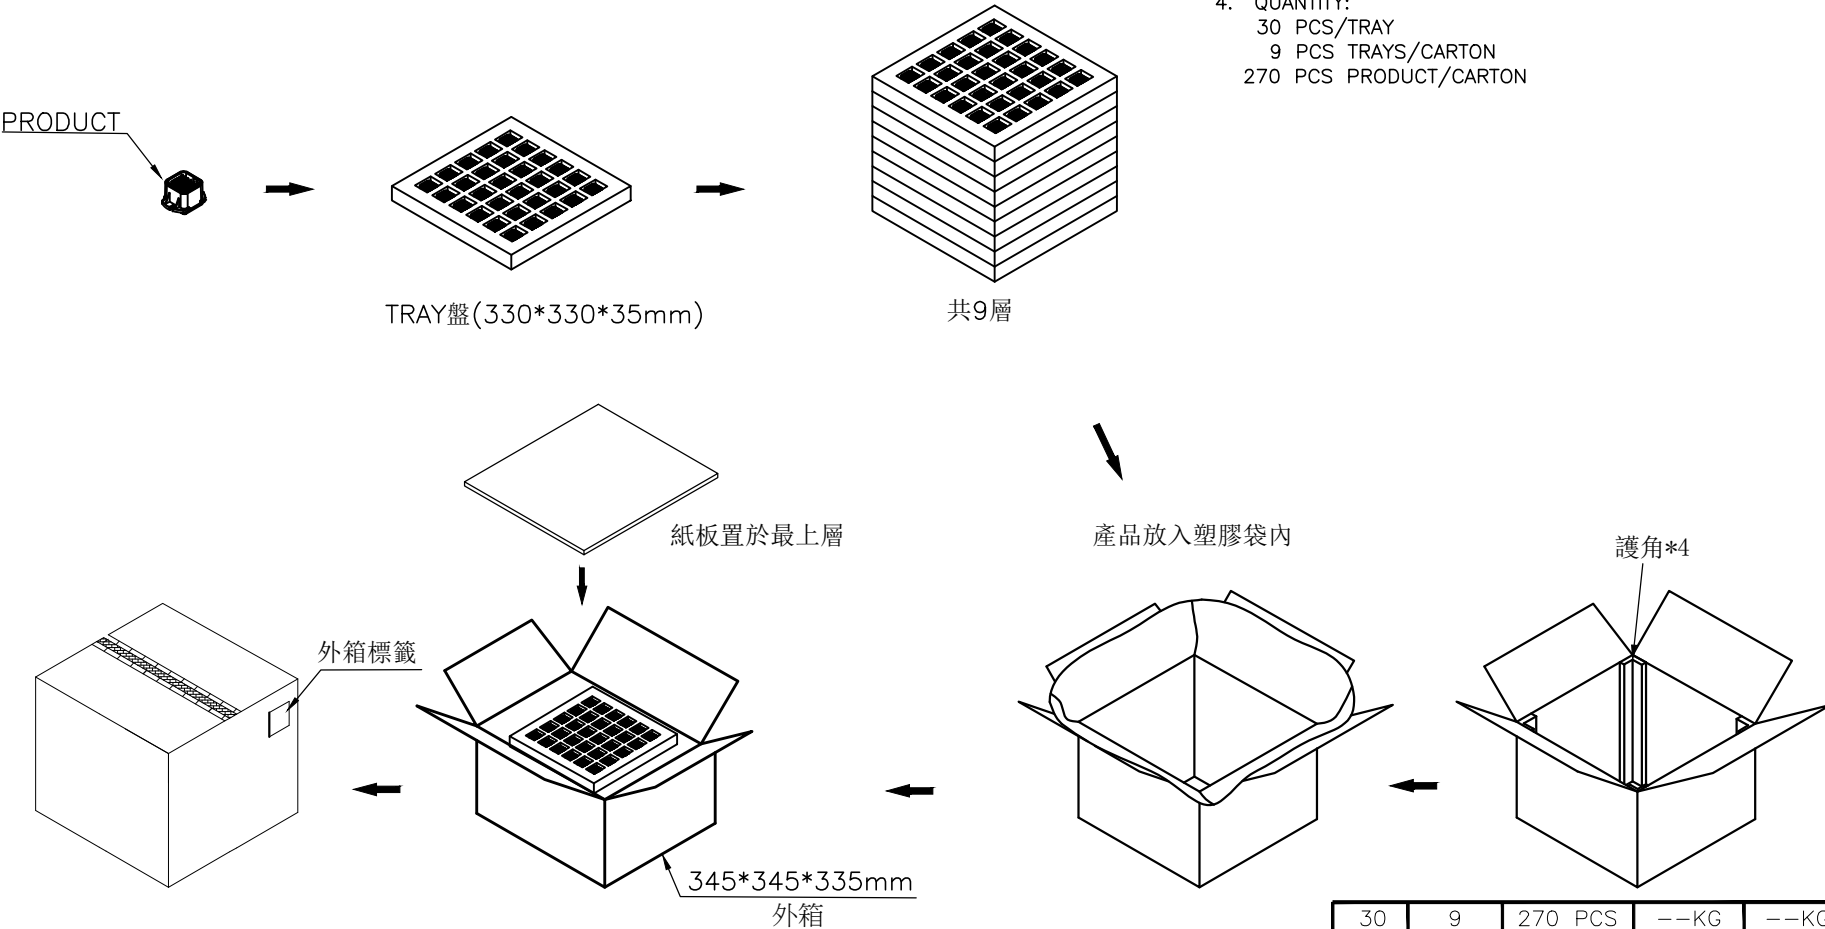

30	9	270 PCS	--KG	--KG
PCS/ TRAY	TYPES/ BOX	QUANTITY	GROSS WEIGHT	NET WEIGHT

04							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE CONNECTOR CART 7+33 PIN MALE					UNIT mm	
	04	Add Glue inlet & Barrier	N2104126	Hank Lu		05-11'21	X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3°	ORIGINAL DATA 11-13'19		T-CONN PRECISION				
	03	PACKING MODIFY	N2006129	Kuowei	--	Victor	06-09'20	DWN.						Kuowei
	02	DIM. MODIFY	N2006121	Kuowei	--	Victor	06-01'20	MATERIAL SEE TABLE	CHK.	--	PART NO. 20-01270-C001-0	SCALE 1 : 1	SIZE A3	REV. 04
	01	NEW DRAWING	--	Kuowei	--	Victor	03-18'20	FINISH SEE TABLE	APVD.	Victor	DWG. NO. C-20-0127X	 SHEET 2 OF 2		
	REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE							