



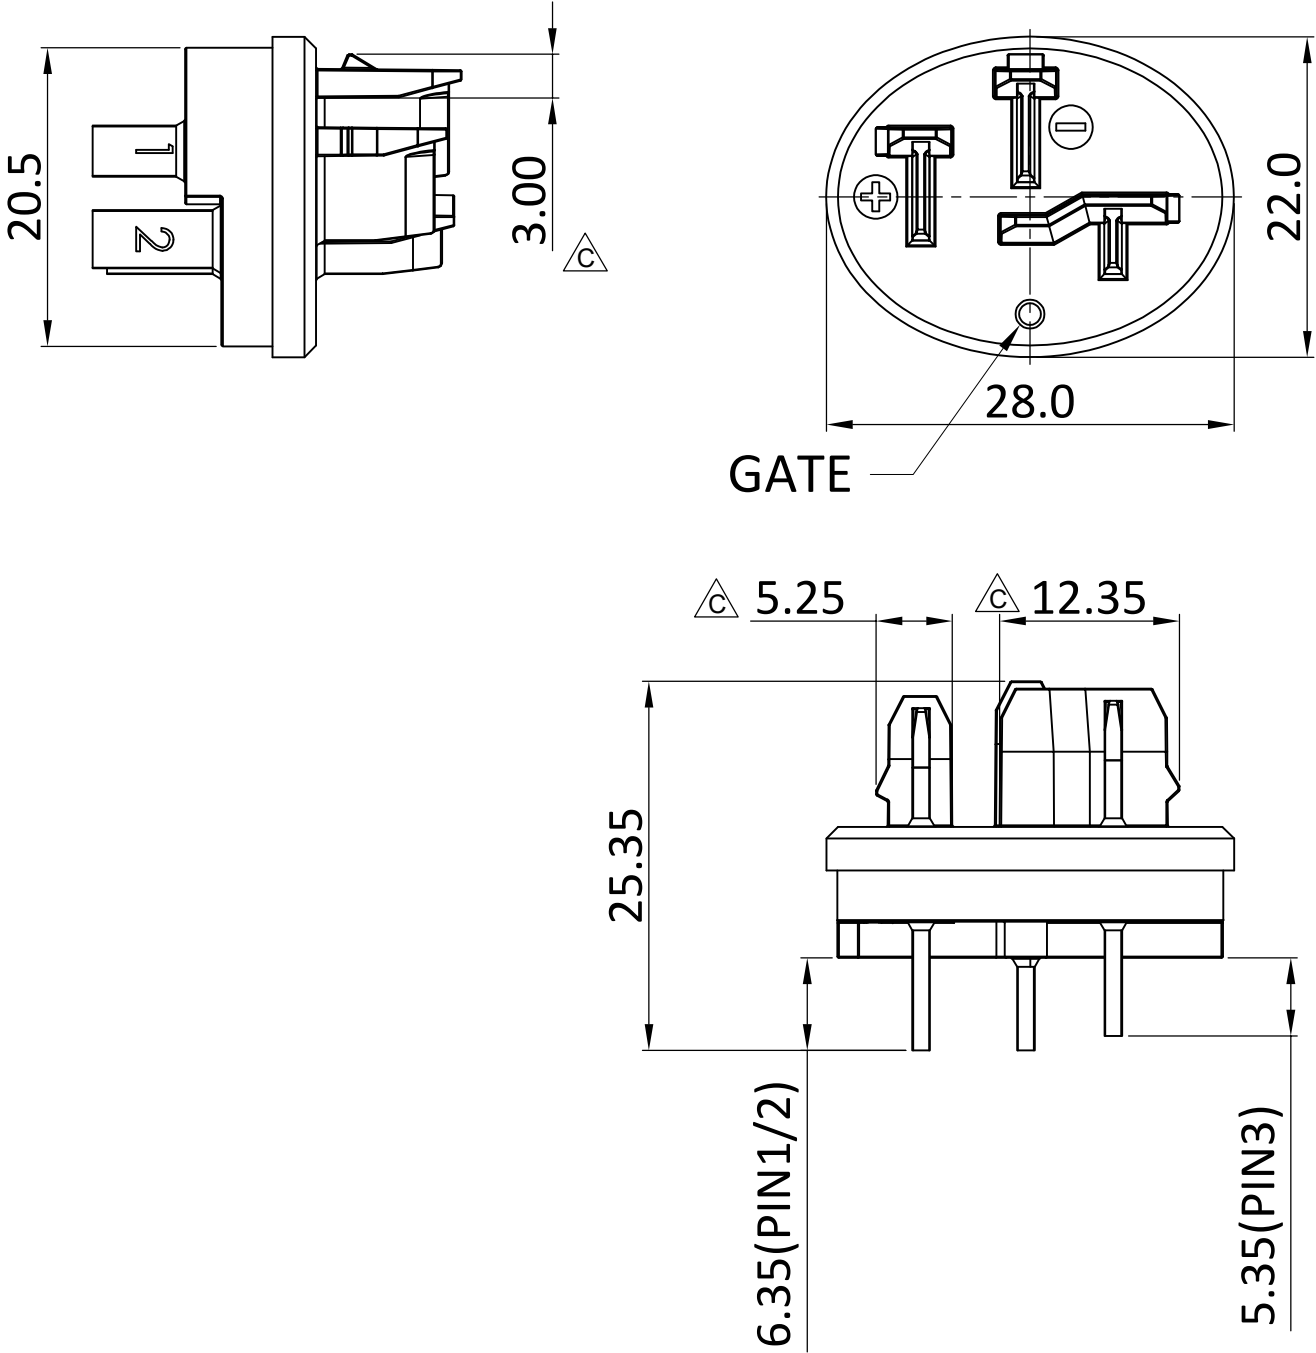


- NOTE:
- 1. MATERIAL:
 - 1-1 HOUSING:PA9T+G.F, UL 94V-0 COLOR:BLACK.
 - 1-2 TERMINAL:COPPER ALLOY C2680.
 - 2. FINISH:
 - 2-1 PLATING: NICKLE 50u" MIN.
 - 3.CHARACTERISTICS:
 - 3-1: RATED VOLTAGE: 5V / 36V
 - 3-2: RATED CURRENT: 6A / 500mA
 - 3-3: CONTACT RESISTANCE: $\leq 10\text{m}\Omega$
 - 3-4: INSULATION RESISTANCE: $\geq 20\text{M}\Omega$
 - 3-5: DIELECTRIC VOLTAGE: 500V AC
 - 3-6: DURABILITY: 200 CYCLES
 - 3-7: TEMPERATURE RANGE: -25~+80°C
 - 3-8: SALT SPRAY TEST: 48H

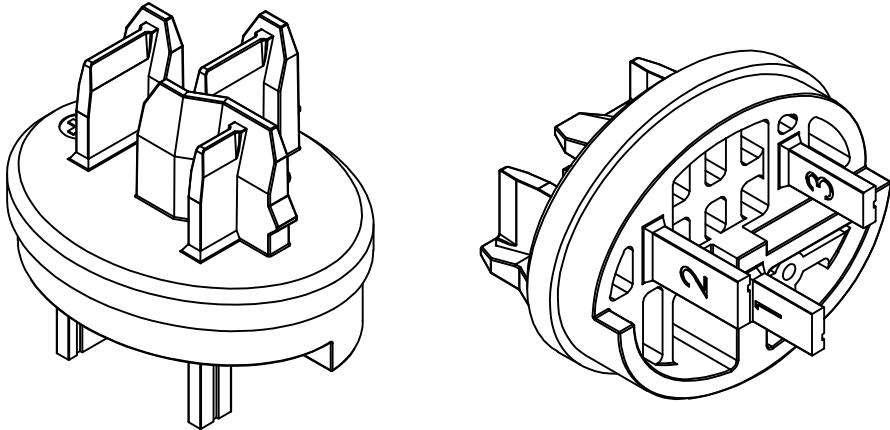

RoHS2+HF	Ni 50u" min.	98-01080-S004-0
GP TYPE	CONTACT AREA PALTING	PART NUMBER

C							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE 3Pin Blade Type Connector				UNIT mm	
							X. ±0.50 X.X ±0.30 X.XX ±0.20 X.XXX ±0.15 ANGEL ±3°	ORIGINAL DATA 03-16'22	 T-CONN PRECISION				
								DWN. Alfred					
	B	RENEW MATERIAL	N2204101	Alfred	Bingo	Victor	04-12'22	MATERIAL SEE TABLE	CHK. Bingo	PART NO. SEE TABLE	SCALE 1:1	SIZE A3	REV. C
	A	FIRST RELEASED	--	Alfred	Bingo	Victor	03-25'22	FINISH SEE NOTE	APVD. Victor	DWG. NO. C-98-0108X			SHEET 1 OF 2
	REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE						

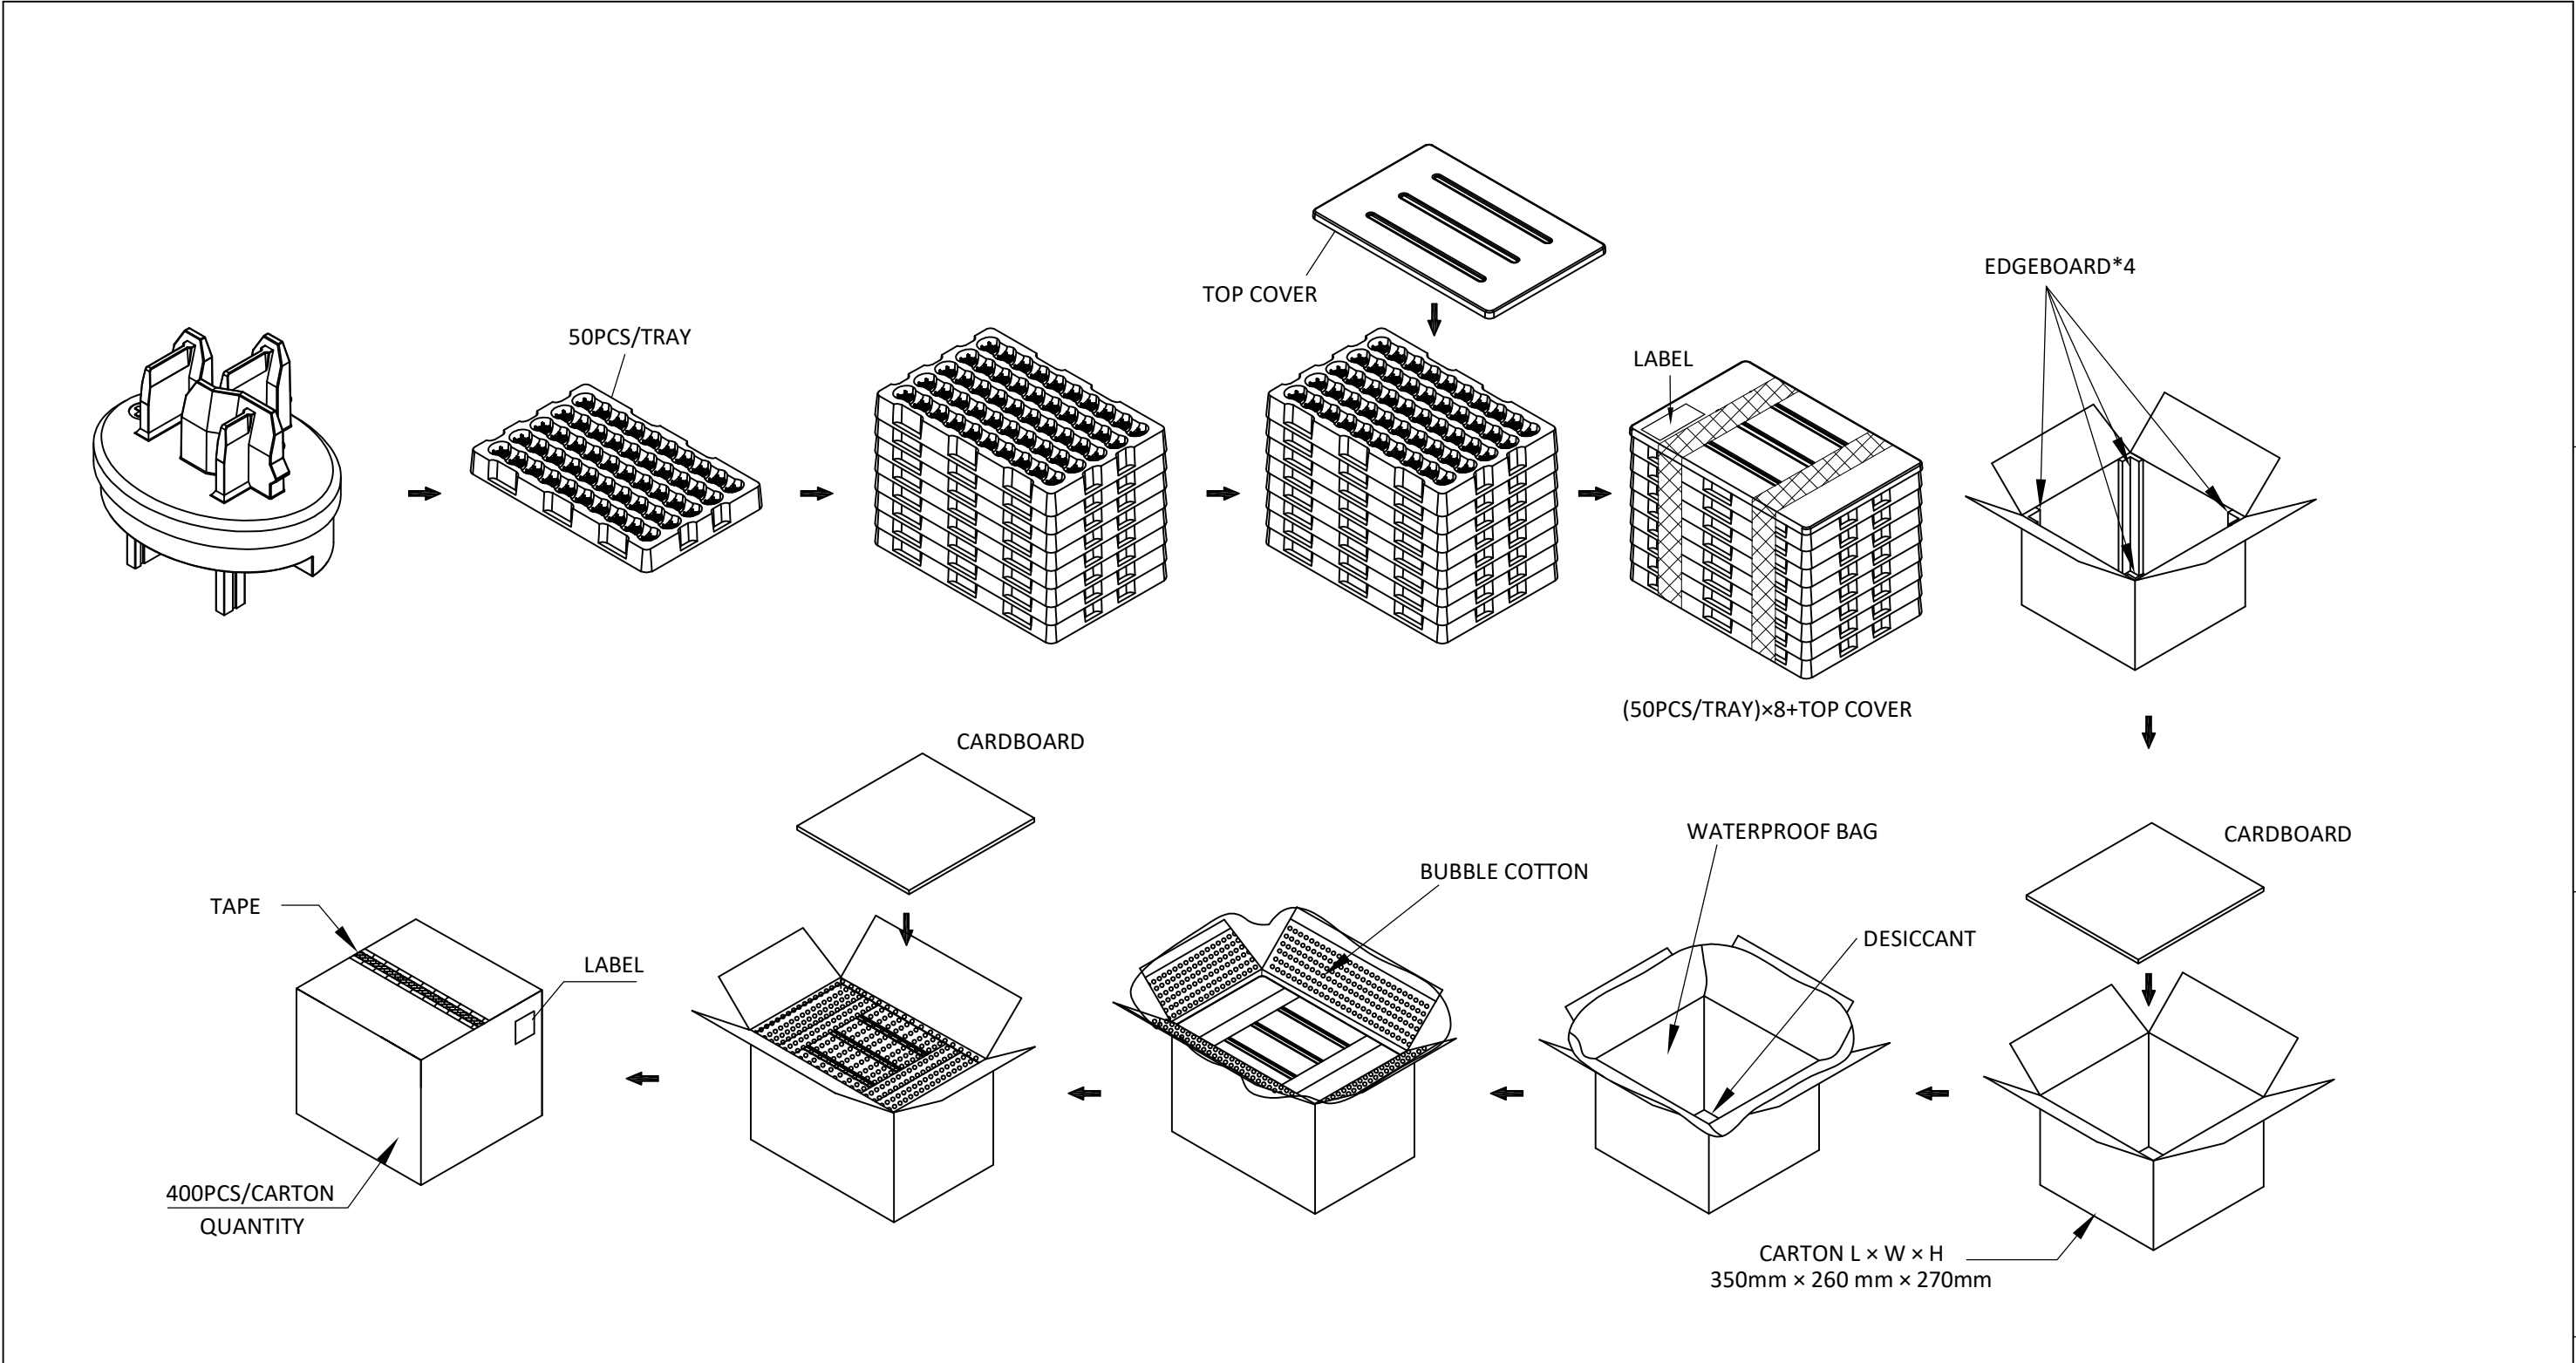

							50	8	400	-- KG	-- KG
							PCS / TRAY	TYPES / BOX	QUANTITY	GROSS WEIGHT	NET WEIGHT
							TOLERANCES UNLESS OTHERWISE SPECIFIED				
							TITLE 3Pin Blade Type Connector				
							ORIGINAL DATA 03-16'22				
							DWN. Alfred				
							CHK. Bingo				
							APVD. Victor				
							MATERIAL --				
							FINISH --				
							T-CONN PRECISION				
							PART NO. SEE TABLE				
							SCALE 1:1				
							SIZE A3				
							REV. C				
							DWG. NO. C-98-0108X				
							SHEET 2 OF 2				