
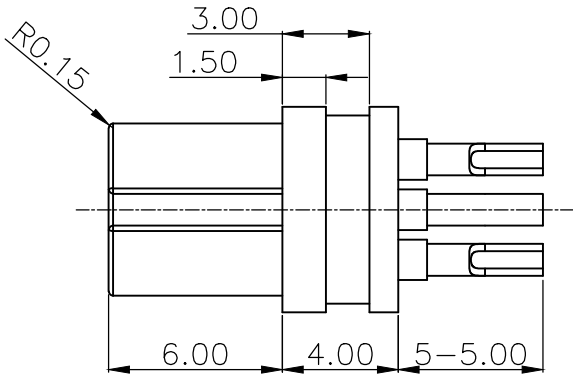
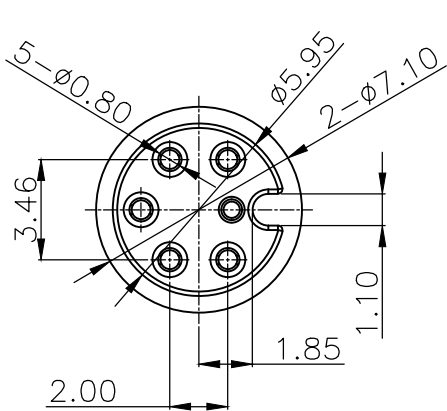
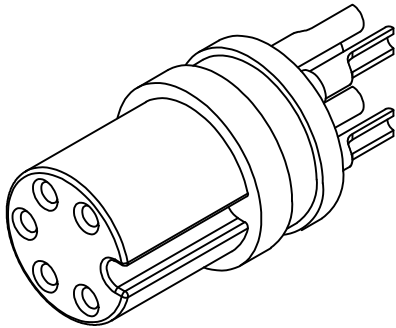
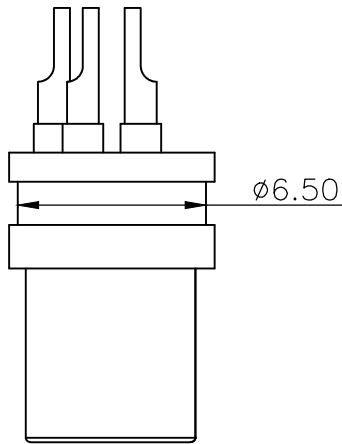


- NOTE:
- MATERIAL:
1-1 HOUSING:PA9T+GF,UL 94V-0, COLOR: GREEN
1-2 TERMINAL:BRASS C3604
 - PLATING: AU UNDERPLATED 50u" MIN. NICKEL
 - CHARACTERISTICS:
3-1: RATED VOLTAGE: 48V AC / 60V DC
3-2: RATED CURRENT: 2A
3-3: CONTACT RESISTANCE: $\leq 10\text{m}\Omega$
3-4: INSULATION RESISTANCE: $\geq 20\text{M}\Omega$
3-5: DIELECTRIC VOLTAGE: 500V AC
3-6: DURABILITY: 200 CYCLES
3-7: TEMPERATURE RANGE: $-25\sim+80^{\circ}\text{C}$

RoHS2+HF	GOLD	98-00280-1051-0
GP TYPE	COATING	PART NUMBER

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		UNIT
							X. ± 0.50 X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.15 ANGEL $\pm 3^{\circ}$	5PIN FEMALE SIGNAL CONNECTOR		mm
							MATERIAL	ORIGINAL DATA		
							SEE NOTE	03-25'21		
							FINISH	DWN. Alfred	PART NO.	SCALE
							SEE NOTE	CHK. --	98-00280-1051-0	1:1
								APVD. Victor	DWG. NO.	SIZE
									C-98-0028X	A3
										REV.
										B
										SHEET
										1 of 2

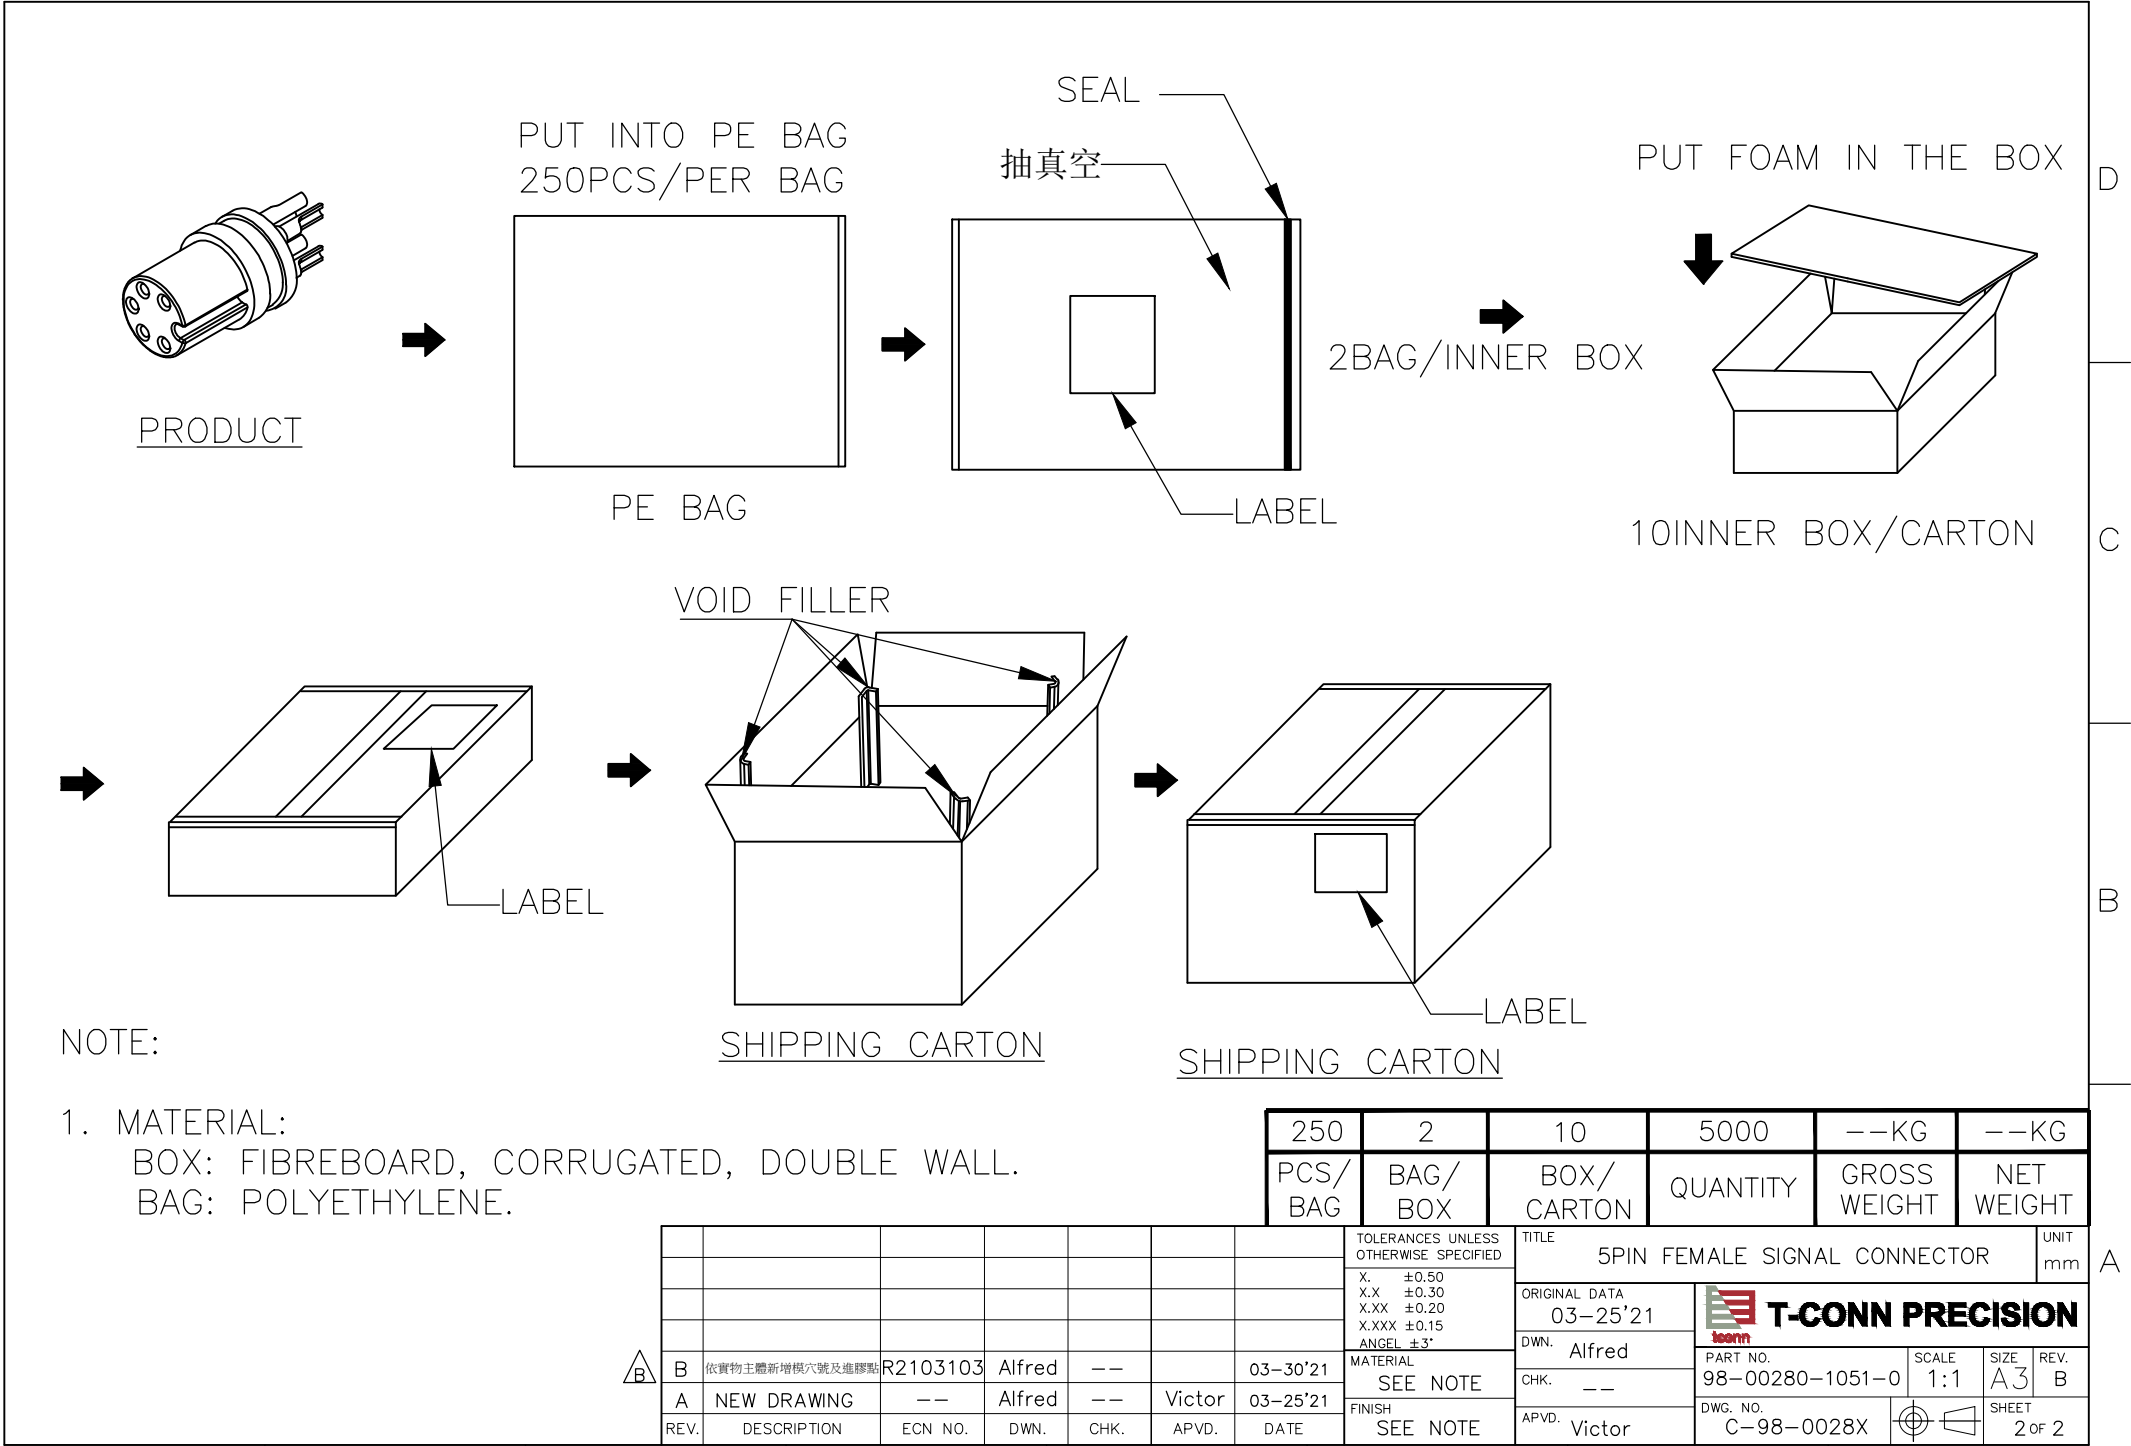

250	2	10	5000	--KG	--KG
PCS/ BAG	BAG/ BOX	BOX/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

							TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		UNIT
							X. ±0.50	5PIN FEMALE SIGNAL CONNECTOR		mm
							X.X ±0.30	ORIGINAL DATA		
							X.XX ±0.20	03-25'21		
							X.XXX ±0.15	DWN. Alfred		
							ANGEL ±3°	CHK. --		
							MATERIAL	APVD. Victor		
							SEE NOTE	PART NO.		
							FINISH	98-00280-1051-0		
							SEE NOTE	DWG. NO.		
								C-98-0028X		
								SCALE 1:1		
								SIZE A3		
								REV. B		
								SHEET 2 OF 2		

B

REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE
B	依實物主體新增模穴號及進膠點	R2103103	Alfred	--		03-30'21
A	NEW DRAWING	--	Alfred	--	Victor	03-25'21

